

C-874

알루미늄제



화스너·래치 자물쇠·캐치 잠금장치·주변기기

화스너

래치 자물쇠

도어 캐치

스내치 록

컨트롤 센터

파이프 관련 쇠장구

그레이팅 록

공업용 자물쇠

전자파 대책

패킹

창틀·카드 홀더

고무 다리 그로멧트 (Grommet)

주변기기 (C)

충진기용 쇠장식

프리저 쇠장식

래싱 시스템



실내 측  
Indoor side



실외측  
Outdoor side

C-874

상품번호 Product No.	RoHS 10	제품질량(g) Mass	코드 Code
C-874	●	340	21701






●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.

특징 Feature

- 차량의 화장실용으로 개발된 제품입니다.
- 앞면에는 재실 표시용 인디케이터가 붙어 있습니다.
- 내부는 조작하기 쉬운 돌기 노브로 3방향의 잠금이 가능합니다.
- This lock was developed to be used for the rest room in the vehicles.
- The indication that the room is occupied is located on the front.
- The knurling knob which is attached to the in-side is easy to operate, and can be locked in three ways.


사양	● 재질: 커버부/AAS 수지 래치/알루미늄 주물 링크부/스테인레스 강판(SUS304)
용도	● 표준색: 회색
비고	● 항공기·버스·특장차의 화장실 도어
	● $\phi 4$ 로드를 사용하십시오. ● 스위치가 있는 스트라이커(LE-874 1424페이지 참조)도 있습니다. 실내등의 스위치 연동에 조합하여 사용하십시오.

Specifications	● Material: Cover: AAS resin Latch: Cast aluminum Link: Stainless steel plate (SUS304)
Specific-use	● Standard color: Gray ● The rest room door of airplanes, buses and specially equipped vehicles
Remarks	● Use in combination with the $\phi 4$ rod is recommended. ● A striker with switch (see page1424, LE-874) is also available. Use in combination with the interior lamp switch interlock.

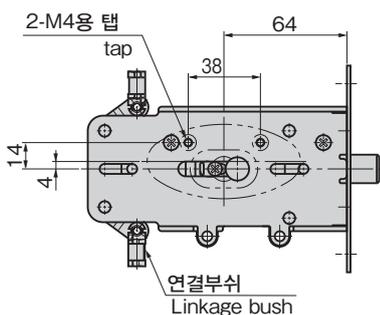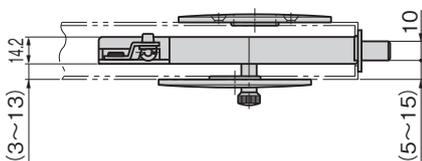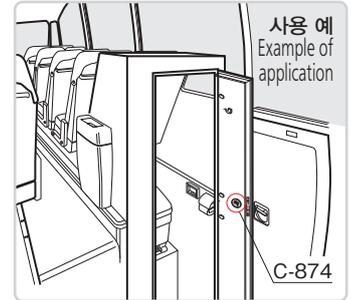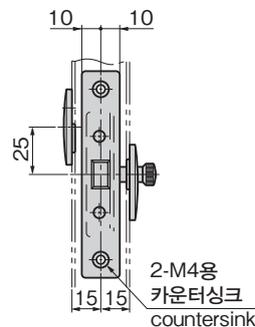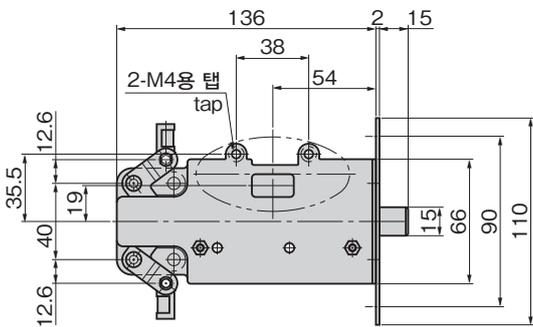


패널 구멍 치수  
Panel drilling dimensions


표시(실외측)  
Indication (Outdoor side)



본체  
Main unit

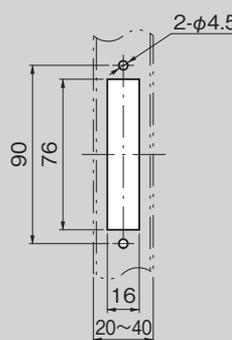

노브(실내측)  
Knob (Indoor side)

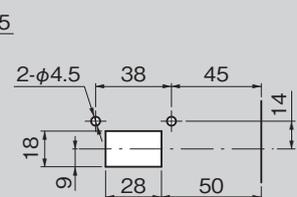

※적용 도어 두께는 20~40mm  
3점 조임은 도어 두께 30mm 이상  
Applicable door thickness is 20 to 40mm.  
For the 3-point securing, applicable door thickness is 30mm or more.