

특징 Feature

- 밀폐용 핸들 FA-1114·FA-114와 부착 호환성이 있습니다(B 구멍 위치).
- 조정 너트로 핸들 회전력을 조정할 수 있습니다.
- 수지와 스텐레스제로 내식성이 뛰어납니다.
- 좌우 겸용형

- Installation is compatible with the airtight handle FA-1114/FA-114 (B-hole position).
- Handle turning force can be adjusted with the adjusting nut.
- Corrosion-resistant plastics and stainless steel are used.
- For both left-hand and right-hand use

사양

- 재질: 핸들·캐치(표면)·베이스(표면)/스텐레스(SUS304)
기타/폴리아세탈(POM)
- 앞면 마무리: 경면 버프 연마
- 부속품: 캐치·스페이서 2장

용도

- 냉온창고·밀폐용 도어

비고

- 출하 시에는 A 위치에 셋팅되어 있습니다.
- 조정 너트, 육각 구멍볼이 고정 나사는 부착 시에 확실하게 조여 주십시오.




Specifi-
cations

- Material: Handle·Striker (front)·Base (front):
Stainless steel (SUS304)
The others: Polyacetal (POM)
- Finish: Mirror surface buffing
- Accessories: Catch and two spacers


Specific use

Remarks


- Doors for cold storage and other airtight case
- At shipment, the handle is installed in the A-hole position.
- Firmly tighten the adjusting nut and hex. socket set screw when installing the handle.

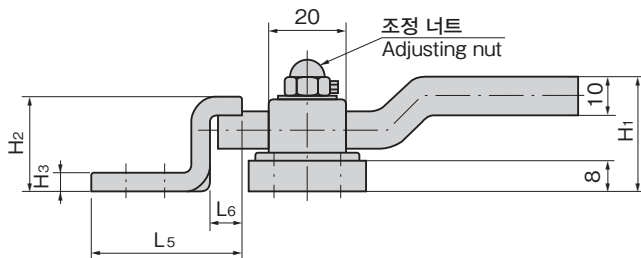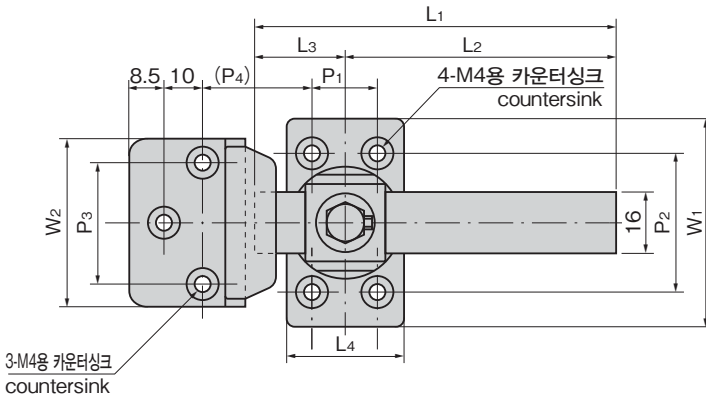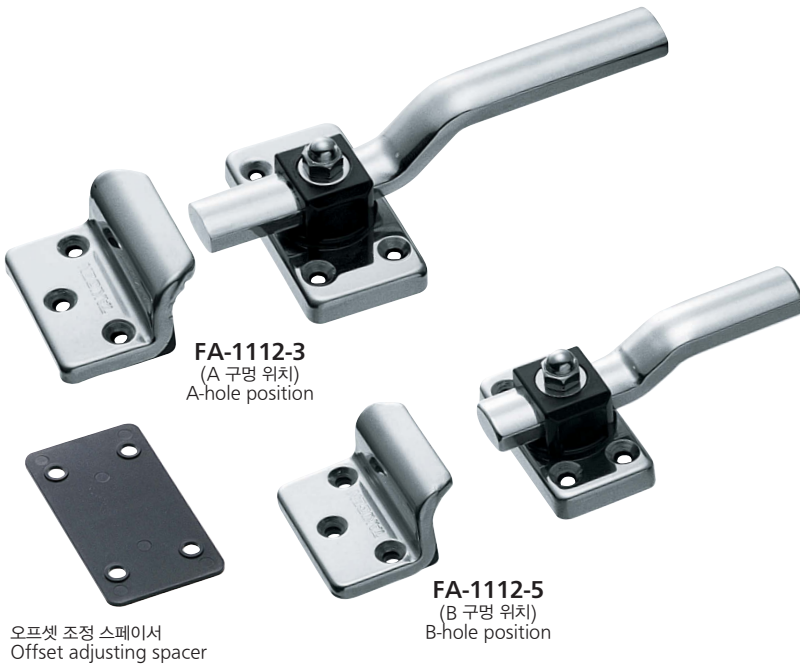

오프셋 조정 스페이스
Offset adjusting spacer



부착 방법
Installation method

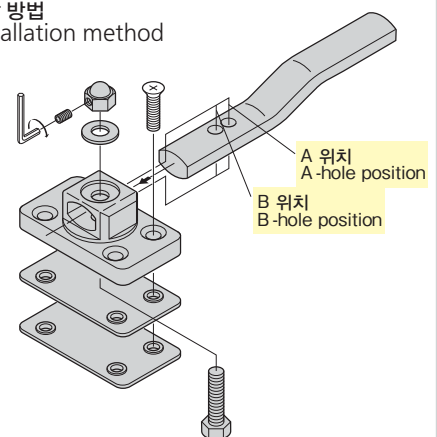

상품 번호 Product No.	RoHS 10	구멍 위치 Hole position	부착 호환성 Installation compatibility	L1	L2	L3	L4	L5	L6	W1	W2	H1	H2	H3	P1	P2	P3	(P4)	제품질량(g) Mass	코드 Code
FA-1112-3	●	A	FA-1114·114-3	133.5	100	33.5	35	39.5	8.5	65	50	37	26	6	22	43	35	37	252	60298
		B			107	26.5												30		
FA-1112-4	●	A	FA-1114·114-4	116.5	85	31.5	33	38	8	60	45	33	25	5	20	40	32	35	221	60300
		B			92	24.5												28		
FA-1112-5	●	A	FA-1114·114-5	100	70	30	30	38	8	55	45	30	25	5	17	37	32	35	192	60302
		B			77	23												28		

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.