평면 스윙 핸들

A-1464-SF
스텐레스제

A-464-SF
아연합금제

NEW RoHS 10 스텐레스 TAK 60

인디케이터 내장 평면 핸들
FLUSH HANDLES WITH INDICATOR

A-1464-SF-1

A-464-SF-3

참고 기사

활용 방법을 비롯하여 개발 비화를 게재하였습니다.

녹색: 잠금 시
Green: Locked

적색: 해제 시
Red: Unlocked

인디케이터로 잠금을 확인할 수 있으므로 잊어버리지 않고 잠금을 확인할 수 있습니다..
Lock can be checked using indicator, allowing checking for an unlocked handle.

키 No.TAK60
Key

키 No.0200
Key

특징 Feature

- 기존품 A-1464/A-464의 인디케이터 사양.
- 부착면에서 스톱퍼까지의 높이가 12.5mm로 낮아서 패널 내부의 설계에 부담을 주지 않습니다.
- 기존품 A-1464/A-1464-C, A-464/A-464-C와 부착 호환성이 있습니다.
- 좌우 겸용형(캠과 스톱퍼를 뒤집으면 좌우를 바꿀 수가 있습니다)

- Previous models A-1464/A-464 designed with indicator.
- Height from installation surface to stopper plate is a minimal 12.5mm, so places no burden on design of board interior.
- Interchangeable with previous models A-1464/A-1464-C, A-464/A-464-C, etc.
- For both left-hand and right-hand use (left and right can be changed by reversing the cam and stopper plate)

사양	• 재질: A-1464-SF/스텐레스강 주물(SUS316) A-464-SF/아연합금(ZDC) • 앞면 마무리: A-1464-SF/헤어 라인 마무리 A-464-SF/서치라이트 크롬 도금(MZCr) • 부속품: 스톱퍼•부착판•나사 세트•키 2개
용도	• 서버 랙, 배전반, 분전반, 제어반
납기	• 표준품•••납기는 문의해 주십시오
비고	• 부착 나사는 스토퍼가 나사에 간섭하지 않도록 조여 주십시오.

Specifications	• Material: A-1464-SF: Cast stainless steel (SUS316) A-464-SF: Zinc alloy (ZDC) • Finish: A-1464-SF: Hairline finish A-464-SF: Satellite chrome plating (MZCr) • Accessories: Stopper plate, installation plate, screws, two keys
Specific use	• Server racks, power/distribution panels, control panels
Remarks	• Tighten the mounting screws far enough that the stopper plate does not come in contact with them.

〔A-1464-SF-1～2
A-464-SF-1～2〕

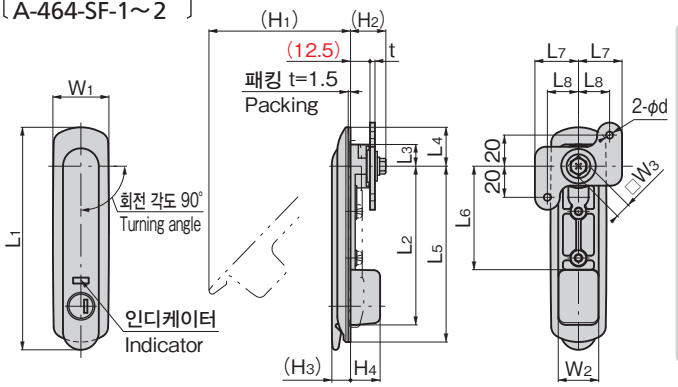

패널 구멍 치수
Panel drilling dimensions



〔A-1464-SF-3
A-464-SF-3〕

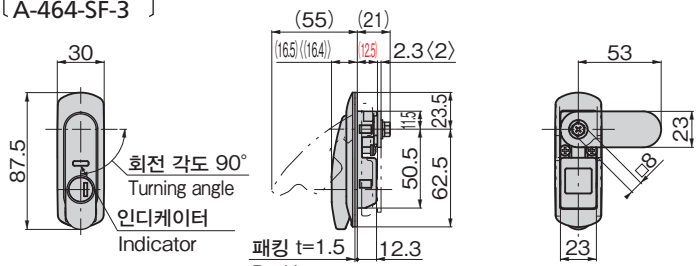

패널 구멍 치수
Panel drilling dimensions



〈 〉는 스텐레스 치수입니다.
〈 〉for stainless-made dimensions.



상품 번호 Product No.	RoHS 10	열쇠 번호 Key No.	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	W1	W2	□W3	W4	(H1)	(H2)	(H3)	H4	t	d	제품질량(g) Mass	최대 적용 판 두께 Max.applicable panel thickness	부속 스톱퍼 Attached stopper plate	코드 Code
A-1464-SF-1	●	0200	143	102	14	25	113	66.5	28	20	117	102.5	36	26	10	27	91	22.5	12	19	3	4.5	525	3.2	AC-1025-E-31	04758
A-1464-SF-2	●	0200	121	83.5	11.5	23.5	95.5	48.5	22	15	96	84	30	23	8	24	70	21	9.6	20.5	2	4.2	365	2.5	AC-1025-E-34	04759
A-1464-SF-3	●	0200	도면 참조 See the drawings																				290		AC-1025-53	04760
A-464-SF-1-TAK60	●	TAK60	143	102	14	25	113	66.5	28	20	117	102.5	36	26	10	27	91	23	12	19	3.2	4.5	455	3.2	AC-25-E-31	04765
A-464-SF-1	●	0200																								04743
A-464-SF-2-TAK60	●	TAK60	121	83.5	11.5	23.5	95.5	48.5	22	15	96	84	30	23	8	24	70	21	9.6	20.5	2.3	4.2	305		AC-25-E-34	04766
A-464-SF-2	●	0200																								04744
A-464-SF-3-TAK60	●	TAK60	도면 참조 See the drawings																				238	2.3	AC-25-53	04767
A-464-SF-3	●	0200																								04745

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.