


멈춤 방지 스톱퍼 장착



A-250-A-1-1



A-250-A-2-1

키 No.0200
Key

고부하 타입 U형도 있습니다.
High-load type with U-rims also available
AC-25-U(635페이지)

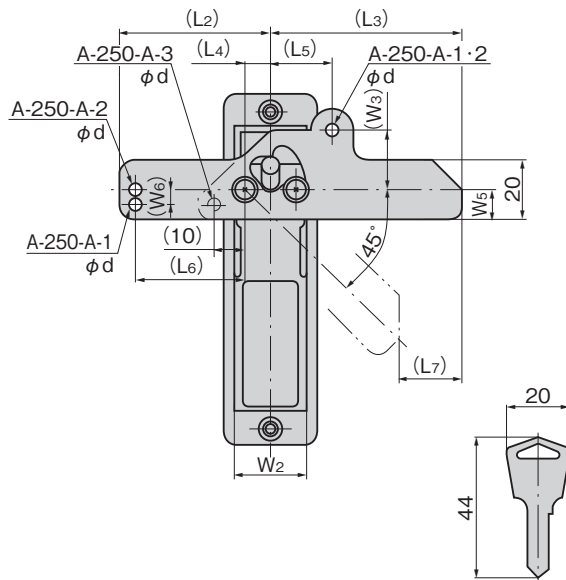
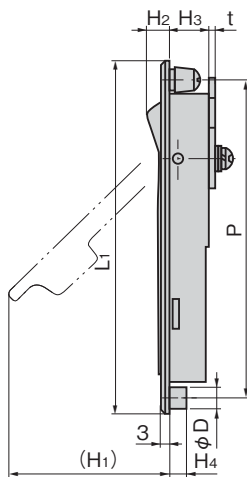

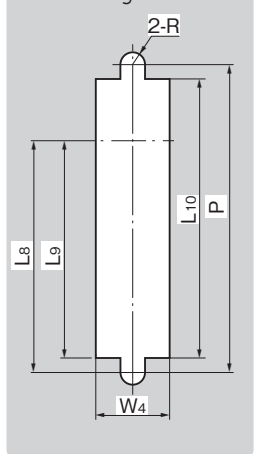
상품 번호 Product No.	RoHS 10	키 번호 Key No.	부속 스톱퍼 Attached stopper plate	코드 Code
A-250-A-1-1	●	0200	AC-25-AB-1N	01773
A-250-A-1-2	●	열쇠 없음 Without lock		01776
A-250-A-2-1	●	0200	AC-25-AB-2N	01774
A-250-A-2-2	●	열쇠 없음 Without lock		01392
A-250-A-3-1	●	0200	AC-25-AB-3N	01775
A-250-A-3-2	●	열쇠 없음 Without lock		01394

특징 Feature

- 스톱퍼는 멈춤 방지 타입을 표준 장착
- 패널 구멍 치수는 A-240과 동일합니다.
- 좌우 겸용형(스톱퍼를 뒤집으면 좌우를 바꿀 수가 있습니다.)
- Anti-seizing type stopper plate is standard.
- Panel drilling dimensions are same as A-240.
- For both left-hand and right-hand use. (The left-hand or right-hand use can be changed by reversing the stopper plate)

사양	- 재질: 아연합금(ZDC) - 앞면 마무리: 서치라이트 크롬 도금(MZCr) - 부속품: 키 -2개·나사 세트·전용 스톱퍼
용도	배분전반·제어반
비고	- 접동부에는 윤활유를 사용해 주십시오. 특히 도로 부착에는 주의해 주십시오. - 본 제품의 자물쇠는 키 선단부에서 조작합니다. - 열쇠를 필요 이상으로 회전시키면 자물쇠 부·열쇠 선단부가 파손될 우려가 있으므로 주의하십시오. - 본 제품의 스톱퍼 부착용 나사는 풀림 방지를 위해 '풀림 방지제'를 도포할 것을 권장합니다.

Specifi- cations	- Material: Zinc alloy (ZDC) - Finish: Satellite chrome plating (MZCr) - Accessories: Two keys, screws and special stopper plate
Specific use Remarks	- Power/distribution and control boards - Use lubrication oil for moving parts. Especially be careful of sticking coating. - The lock on this product is operated with the tip of the key. - Note that care is required, since turning the key more than is necessary risks damaging the lock or the tip of the key. - It is recommended that thread-locking fluid be used to prevent loosening of the mounting screws for the catch.

패널 구멍 치수
Panel drilling dimensions

상품 번호 Product No.	L ₁	(L ₂)	(L ₃)	(L ₄)	(L ₅)	(L ₆)	(L ₇)	L ₈	L ₉	L ₁₀	W ₁	W ₂	(W ₃)	W ₄	W ₅	(W ₆)	(H ₁)	H ₂	H ₃	H ₄	t	P	φD	φd	R	적용 판 두께 Applicable panel thickness	제품질량(g) Mass
A-250-A-1-1	142	49.5	65.5	9.5	18	34.5	25.5	93	87.5	117	32	26	22	27	15	5	70	10	17	7	3.2	128	8	2-φ4.2	4.5	1.0~2.5	360
A-250-A-1-2	117	48.5	61.5	8.5	20	35	20.5	79	74.5	96	30	23	20	24	10	58	8	12.5	6	2.3	105	7	2-φ4.2	4	1.0~2.5	235	
A-250-A-2-1																											
A-250-A-2-2	84	61.5	8.5	20	48	43.5	63	28	23	24	9.5	4.5	35	8	12.5	6	2.3	72	7	φ4.1	4	1.0~2.5	155				
A-250-A-3-1																											
A-250-A-3-2																											

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.