



A-309-1S-1-SP



A-309-2D-1-SP





키 No.T0230 Key

특징 Feature

- 물기가 없는 플랫 디자인
- 누름 버튼에 의한 원터치 오픈
- 도어의 밀폐를 조정 나사로 미세조정할 수 있습니다.
- 방수 타입(O링·패킹 사용)
- 자물쇠는 방진 셔터 내장 리시버블 키
- Flush type Non-protrusion from the panel surface
- One-touch unlocking by pushing the button.
- Fine adjustment of the door tightness can be made with the adjustment screw.
- Waterproof (O-ring and packing are used)
- Lock has a reversible key and dustproof shutter.

사양	<ul style="list-style-type: none"> • 재질: 아연합금(ZDC) • 앞면 마무리: 아크릴계 수지 열처리 도장 • 적용 판 두께: 1~4mm • 부속품: 키 2개
용도	<ul style="list-style-type: none"> • 보온·방진 등 강력 밀폐를 필요로 하는 기기·진동기기·특장차·엔진 발전기
Specifi-cations	<ul style="list-style-type: none"> • Material: Zinc alloy (ZDC) • Finish: Acrylic resin baked • Applicable panel thickness: 1 to 4 mm • Accessories: Two keys • Any device which needs thermal insulation, dustproof or tight sealing, oscillation devices and specially equipped vehicles, engine dynamo
Specific-use	<ul style="list-style-type: none"> • Any device which needs thermal insulation, dustproof or tight sealing, oscillation devices and specially equipped vehicles, engine dynamo

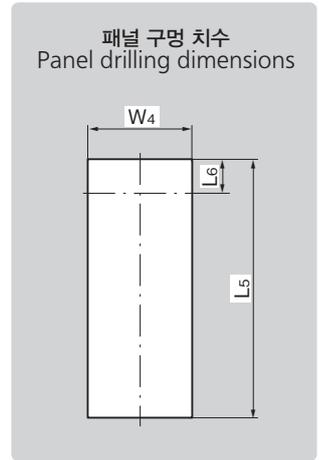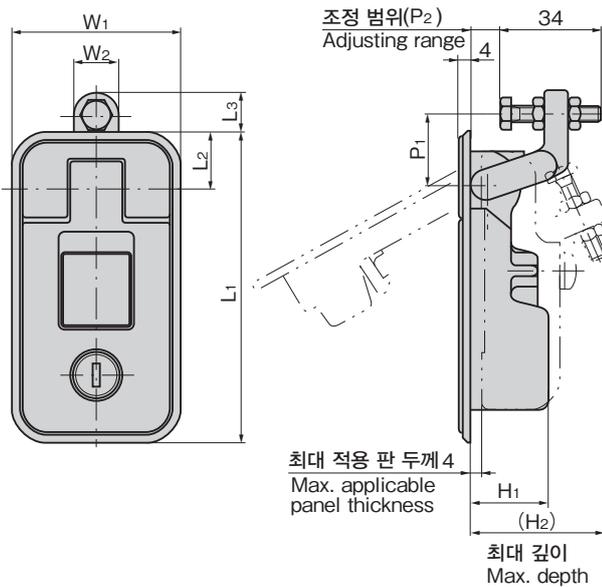

상품 번호 Product No.	RoHS 10	비고 Remarks	L1	L2	L3	L4	L5	L6	W1	W2	W3	W4	H1	(H2)	P1	P2	제품질량(g) Mass	코드 Code
A-309-1S-1-SP	●	열쇠 포함 With lock	109	20	13	90	91	12	56	16	34	35	27	51	25	0~15	480	04656
A-309-1S-2-SP	●	열쇠 없음 Without lock																
A-309-1D-1-SP	●	열쇠 포함 With lock	109	20	28	90	91	12	56	16	34	35	27	71	40	15~30	490	04654
A-309-1D-2-SP	●	열쇠 없음 Without lock																
A-309-2S-1-SP	●	열쇠 포함 With lock	85.5	19	12.5	70	71	11	41	12	24	25	26	51	25	0~15	280	04660
A-309-2S-2-SP	●	열쇠 없음 Without lock																
A-309-2D-1-SP	●	열쇠 포함 With lock	85.5	19	28	70	71	11	41	12	24	25	26	71	40	15~30	290	04658
A-309-2D-2-SP	●	열쇠 없음 Without lock																

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.