

A-1372-F

스텐레스제

A-372-F·A-372-S

알루미늄제

A-372-RC

고무제



A-1372-F-1-TAK60



A-372-F-2-TAK60

A-372-1-H
(A-172-H)

A-372-3-S



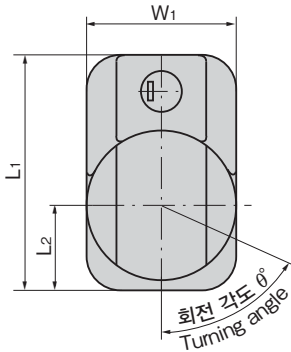






A-372-RC


키 No.TAK60
Key키 No.0200
Key

A-372-2·3-H

[A-1372-F-1~3·A-372-F-1~3]

패널 구멍 치수
Panel drilling dimensionsA-1372-F-1
A-372-F-1A-1372-F-2
A-372-F-2A-1372-F-3
A-372-F-3

No.TAK60



No.0200

상품명 Product No.	RoHS 10	열쇠 번호 Key No.	코드 Code
A-1372-F-1-TAK60	●	TAK60	04145
A-1372-F-1	●	0200	04506
A-1372-F-2-TAK60	●	TAK60	04146
A-1372-F-2	●	0200	04507
A-1372-F-3-TAK60	▲	TAK60	04147
A-1372-F-3	▲	0200	04508
A-372-F-1-TAK60	▲	TAK60	04063
A-372-F-1	●	0200	04328
A-372-F-2-TAK60	●	TAK60	04064
A-372-F-2	●	0200	04329
A-372-F-3-TAK60	●	TAK60	04065
A-372-F-3	●	0200	04330

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.

상품명 Product No.	재질 Material	L1	L2	W1	W2	□W3	H1	H2	φd	P1	P2	N	θ°	최대 적용 판 두께 Max. applicable panel thickness	적용 핸들 Applicable handle	제품질량(g) Mass
A-1372-F-1-TAK60	SUS	97	35	60	41	10	21.5	6	8	40	32	2	65	5	A-372-1-H	907
A-1372-F-1		80	29	46	32	8	13.5	5	7	32	16	2	60	2.3	A-372-2·3-H	587
A-1372-F-2-TAK60		67	22	35	32	8	13.5	5	7	32	16	2	60	2.3	A-372-2·3-H	417
A-1372-F-2		67	22	35	32	8	13.5	5	7	32	16	2	60	2.3	A-372-2·3-H	417
A-1372-F-3-TAK60	ADC	97	35	60	41	10	21.5	6	8	40	32	2	65	5	A-372-1-H	435
A-1372-F-3		80	29	46	32	8	13.5	5	7	32	16	2	60	2.3	A-372-2·3-H	285
A-372-F-1-TAK60		67	22	35	32	8	13.5	5	7	32	16	2	60	2.3	A-372-2·3-H	215
A-372-F-1		67	22	35	32	8	13.5	5	7	32	16	2	60	2.3	A-372-2·3-H	215

특징 Feature

- 열쇠와 탈착 핸들 양쪽에서 잠금, 해제하는 안전 기구
- 자물쇠는 조작성이 뛰어난 방진 셔터 내장 신형 리버시블 키 TAK60을 표준 장착
- 스테인레스제로 내식성이 뛰어납니다. (A-1372-F)
- 방수 타입(O링·시트 패킹 사용)
- 좌우 겸용형(표준품은 오른손용으로 셋팅되어 있습니다. 왼손용으로 사용하실 때는 지정해 주십시오.)
- Safety mechanism: locked/unlocked by both key and insertion/removing handle.
- The lock comes standard with the TAK60, a new-style reversible key with an easy-to-use dustproof shutter.
- It is made of stainless steel for great corrosion resistance. (A-1372-F)
- Waterproof (using O-ring and sheet packing)
- For both left-hand and right-hand use. (standard: the right-hand use. Specify the left-hand use as needed.)


- 사양**
- 재질: A-1372-F/스텐레스강 주물 (SUS304)
A-372-F·A-372-3-S/알루미늄 합금 (ADC)
 - 표면 마무리: A-1372-F/헤어 라인 마무리
A-372-F·A-372-3-S/실버 메탈릭 도장
 - 열쇠 번호: TAK60
 - 부속품: 키 2개·대너트·나사 세트
- 용도**
- 큐비클·배분전반·제어반
- 비고**
- 마스터 시스템, 지정 동번, 열쇠가 다른 타입도 제작합니다.
 - 본 제품의 스토퍼 부착용 나사는 풀림 방지를 위해 '풀림 방지제'를 도포할 것을 권장합니다.

- Specifications**
- Material: A-1372-F: Cast stainless steel (SUS304)
A-372-F·A-372-3-S: Aluminum alloy (ADC)
 - Finish: A-1372-F: Hairline finish
A-372-F·A-372-3-S: Silver metallic coating
 - Key No.: TAK60
 - Accessories: Two keys, big nut, screws.
- Specific use Remarks**
- Cubicles, distribution boards, control boards etc.
 - It is recommended that thread-locking fluid be used to prevent loosening of the mounting screws for the catch.

[A-372-RC]

- 사양**
- 재질: 에틸렌·프로필렌 고무(EPDM)
- Specifications**
- Material: Ethylene Propylene rubber (EPDM)


부착 방법 Installation method




상품번호 Product No.	RoHS 10	L ₁	L ₂	L ₃	L ₄	W ₁	W ₂	H	코드 Code
A-372-RC-1-F	●	108	16	17	10	71	22	32.5	03740
A-372-RC-2-F	●	88	17	15	11	55	18	32	03741
A-372-RC-3-F	●	76	17	15	11	44	16	32	03742

- : RoHS10 대응품
▲: RoHS10에 대응가능합니다.

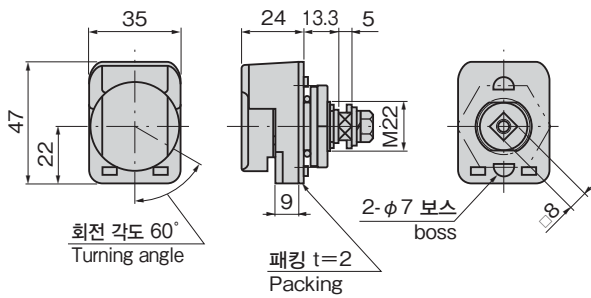[A-372-3-S]




패널 구멍 치수 Panel drilling dimensions




상품번호 Product No.	RoHS 10	적용 핸들 Applicable handle	최대 적용 판 두께 Max. applicable panel thickness	제품질량(g) Mass	코드 Code
A-372-3-S	●	A-372-2·3-H	2.3	117	03196

- : RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.

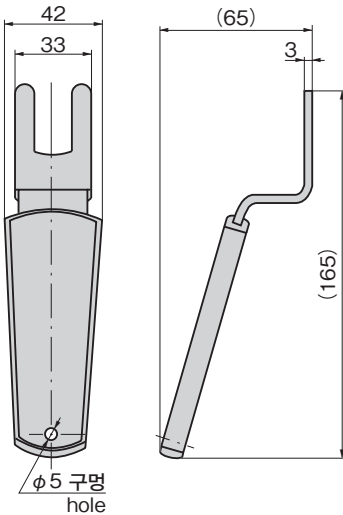[A-372-1-H·A-172-H]



[A-372-2·3-H]



상품번호 Product No.	RoHS 10	제품질량(g) Mass	코드 Code
A-372-1-H	●	120	00376
A-372-2·3-H	●	50	01664

- : RoHS10 대응품
▲: RoHS10에 대응가능합니다.

[A-372-RC]

