



(일반사단법인)일본배전제어시스템공업회
비상용배전반 등 기기인정위원회 등록품
내화형 도어용 손잡이



스톱퍼
Stopper plate



스톱퍼는 630~635의
□8 구멍 중에서
선택하십시오.
Select the stopper
plate with □8-hole on
page 630 to 635.

상품번호 Product No.	RoHS 10	(L)	재질 Material	제품질량(g) Mass	코드 Code
A-1146-1	●	6.5	SUS	80	00740
A-146-1	●	6	ZDC	65	00328
A-121-H	●		SUS	40	00269

●: RoHS 10 대응품
▲: RoHS 10에 대응가능합니다.

특징 Feature


- 내화·내열·내염·내산(A-1146-1)
- 좌우 겸용형
- Fire, heat, saltwater acid-resistant. (A-1146-1)
- For both left-hand and right-hand use.

사양

[A-1146-1]	● 재질: 본체/스테인레스강 주물(SUS304) 핸들/냉간 압연 스테인레스 강판 (SUS304) ● 표면 마무리: 본체/절삭 가공 핸들/배럴 연마 ● 적용 판 두께: 1mm
[A-146]	● 재질: 본체/아연합금(ZDC) 핸들/냉간 압연 스테인레스 강판 (SUS304) ● 표면 마무리: 본체/크롬 도금(MZCr) 핸들/배럴 연마
용도	● 옥외 배분전반·제어반
비고	● SUS316도 제작합니다. ● 본 제품의 스톱퍼 부착용 나사는 풀림 방지를 위해 '풀림 방지제'를 도포할 것을 권장합니다.

Specifications

[A-1146-1]	● Material: Main body: Cast stainless steel (SUS304) Handle: Cold rolled stainless steel plate (SUS304) ● Finish: Main body: Cutting. Handle: Barrel polishing ● Applicable panel thickness: 1mm
[A-146]	● Material: Main body: Zinc alloy (ZDC) Handle: Cold rolled stainless steel plate (SUS304) ● Finish: Main body: Chrome plating (MZCr) Handle: Barrel polishing
Specific use	● Outdoor power/distribution and control boards
Remarks	● It is recommended that thread-locking fluid be used to prevent loosening of the mounting screws for the catch.

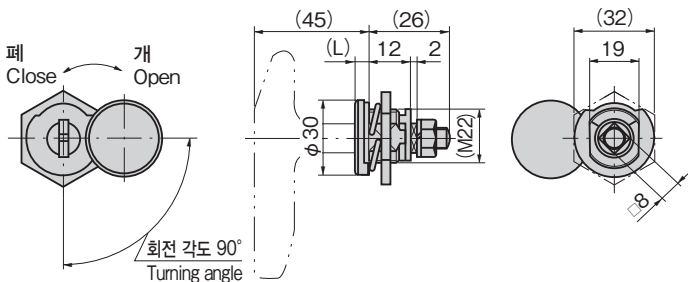

패널 구멍 치수
Panel drilling
dimensions

