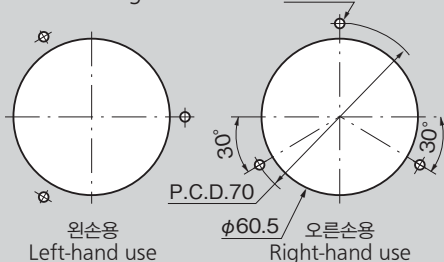
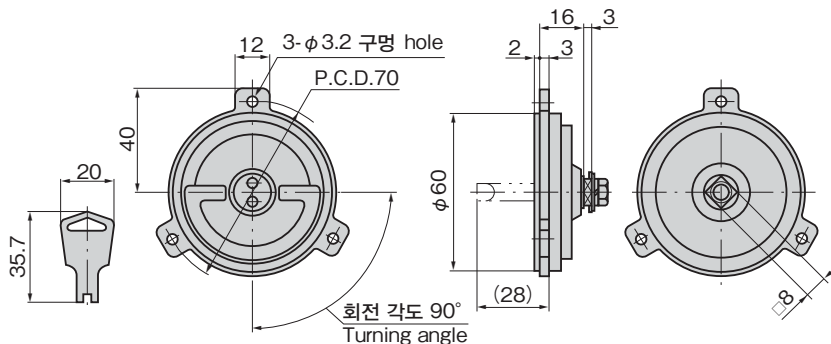


A-55-1

키 No.100
Key

패널 구멍 치수

Panel drilling dimensions

왼손용
Left-hand use오른손용
Right-hand use회전 각도 90°
Turning angle

상품번호 Product No.	RoHS 10	비고 Remarks	코드 Code
A-55-1	●	열쇠 포함 With lock	00178
A-55-2	●	열쇠 없음 Without lock	00179

●: RoHS10 대응품

▲: RoHS10에 대응가능합니다.



원형 평면 핸들

ROUND-SHAPED FLUSH HANDLES

특징 Feature

- 좌우 겸용형(스톱퍼를 뒤집으면 좌우를 바꿀 수가 있습니다.)
- For both left-hand and right-hand use. (the left-hand or right-hand use can be changed by reversing the stopper plate)

사양

- 재질: 아연합금(ZDC)
- 표면 마무리: 핸들/크롬 도금(MZCr)
본체/어벤추린 크롬 도금(MZCr)

- 부속품: 키 2개
- 제품질량: 150g

용도

- 배분전반·제어반

비고


- 본 제품의 스톱퍼 부착용 나사는 풀림 방지를 위해 '풀림 방지제'를 도포할 것을 권장합니다.

Speci-
fications


- Material: Zinc alloy (ZDC)
- Finish: Handle: Chrome plating (MZCr)
Main body: Aventurine chrome plating (MZCr)
- Accessories: Two keys
- Mass: 150g

Specific use
Remarks

- Power / distribution and control boards
- It is recommended that thread-locking fluid be used to prevent loosening of the mounting screws for the catch.

스톱퍼
Stopper
plate

스톱퍼는 630~635페이지의
□8 구멍 중에 선택하십시오.
Select the stopper plate with
□8-hole on page 630 to 635.

부착 방법
Installation
method

도어면으로부터의 돌기가 적은 평면 타입
Small projection-from-door flat type