

AP-2

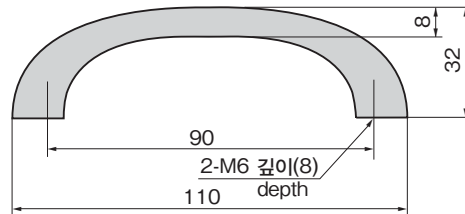

플라스틱제

A-2

아연합금제

손잡이 1형
PULLS TYPE I

A-2

AP-2-Black
블랙AP-2-Gray
그레이AP-2-Ivory
아이보리

상품번호 Product No.	RoHS 10	제품질량(g) Mass	사용 하중 N Working load	코드 Code
A-2	●	73	392	00002
AP-2-Black	▲	17	245	00003
AP-2-Gray	●			00004
AP-2-Ivory	▲			00005

●: RoHS10 대응품

▲: RoHS10에 대응가능합니다.

특징 Feature

- 부착용 나사 구멍은 황동제 인서트 쇠팅식 사용
- Brass-made insertion fittings are used for screw holes.

사양

- 재질: AP-2/PC+ABS 합금
A-2/아연합금(ZDC)
- 표면 마무리: A-2/크롬 도금(MZCr)
- 표준색: 블랙·그레이·아이보리(AP-2)
- 특주색: 블루·옐로우(AP-2)

용도

- 계측기기·통신기기

비고



- 본 제품은 비결정성 수지제를 사용하고 있어서 풀림 방지제에 대해 적합하지 않으므로 사용하지 마십시오. (일부 풀림 방지제의 주의사항에도 기재되어 있습니다.)
- 상온에서 사용하십시오. (AP-2)
- 나사 조임 토크 권장값: 2.6N·m
- 풀림 방지제 등 용제를 사용할 때는 충분한 검증을 실시하십시오. (AP-2)

Specifications

- Material: AP-2: PC+ABS alloy
A-2: Zinc alloy (ZDC)
- Finish: A-2: Chrome plating (MZCr)
- Standard color: Black, gray, ivory (AP-2)
- Custom-made color: Blue, yellow (AP-2)

Specific use

Remarks



- Measuring or communication equipment
- This product uses noncrystalline resin. It is not suitable for thread-locking fluid so use should be avoided. (Also noted in the precautions of some types of thread-locking fluid.)
- Use the product in normal temperatures.(AP-2)
- Recommended screw tightening torque: 2.6N·m
- Be sure to test adequately when using a solvent such as thread-locking fluid. (AP-2)

크레몬

콜러 잠금

특장 밀폐
핸들

프리저 밀폐

평면 스윙

평면 핸들

팝 핸들