


B-20257·B-35821~

스텐레스제·철제



긴 경첩

CONTINUOUS HINGES

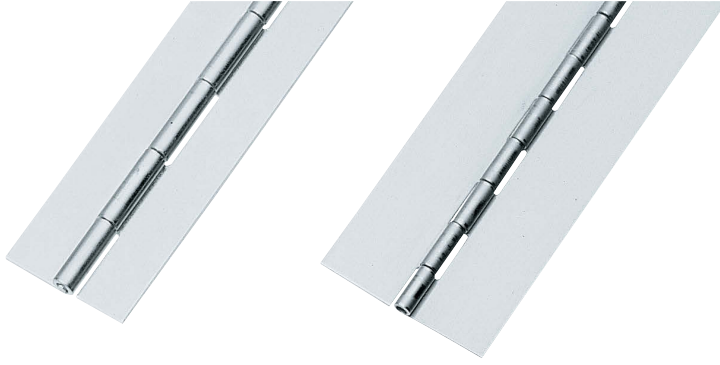

B-35825-14D


B-35822-12C

특징 Feature

- 용도에 따라 재질을 선택할 수 있습니다.
- 절단해서 사용할 수 있습니다.
- Suitable material can be selected according to the purpose.
- Can be cut optionally.


사양	● 재질: 열간 압연 강판(SPHC) 냉간 압연 강판(SPCC) (축은 스텐레스제) 스텐레스 강판(SUS304) ● 표면 마무리: SPCC·SPHC/ 아연 도금 크로메이트 처리 (MFZn-C)
용도	● 항공기·통신기기·측정기기·선박·차량·소형 컨테이너 등의 케이스
납기	● 표준품...납기는 문의해 주십시오
비고	● 항공기에는 MS 규격품을 사용해 주십시오. ● 필요한 치수로 절단한 후 축에 코킹 등의 빠짐 방지 가공을 한 후 사용해 주십시오. ● 양단에 빠짐방지 가공을 하는 경우에는 반드시 같은 날개로 해주십시오. 다른 날개로 하면 작동 불량 원인이 됩니다. ● 장착 상품이기 때문에 배송료가 듭니다. 상세한 내용은 문의해 주십시오.

Specifi-cations	● Material: Hot rolled steel plate (SPHC) Cold rolled steel (SPCC) (The axle is stainless steel) Stainless steel (SUS304) ● Finish: SPCC, SPHC: Zinc plating chromate treatment (MFZn-C)
Specific-use	● Communication devices, measurement devices, ships, specially equipped vehicles, construction machinery, small containers.
Remarks	● The MS (Military Standard) articles must be used for the air crafts. ● The hinge is not processed to prevent extraction of the shaft. After cutting the hinge to size and before use, fix stops, etc., on the shaft to prevent its extraction. ● When fixing stops on both ends, always fix on the same wing. Fixing on different wings may cause faulty operation.

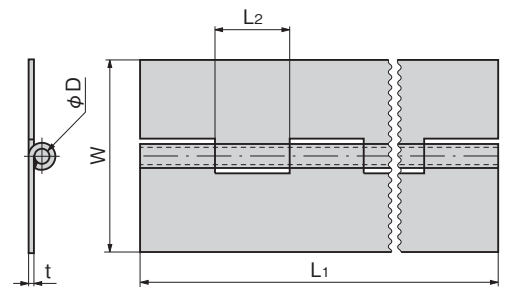

축은 스텐레스제입니다. Shaft is made of stainless steel

사용 예
Example of application



상품명 Product No.	RoHS 10	비고 Remarks	L ₁	L ₂	W	t	ϕD	제품질량(g) Mass	코드 Code
B-20257-C1	●	SUS 304	1829	15	19	0.8	2.0	315	11134
B-20257-C2	●		1829	15	27	1.0	3.0	570	11135
B-20257-C3	●		1829	15	32	1.2	3.0	760	11136
B-20257-C4	●		1829	15	38	1.5	3.0	1,100	11137
B-20257-C5	●		1829	15	51	1.5	5.0	1,580	11138
B-20257-C6	●		1829	50	51	1.5	5.0	1,610	11139
B-35822-10C	●		1829	15	32	1.0	3.0	630	11147
B-35822-11C	●		1829	15	38	1.0	3.0	730	11148
B-35822-12C	●		1829	15	51	1.0	3.0	885	11149
B-35823-6C	●		1829	15	38	1.2	3.0	850	11152
B-35823-7C	●		1829	15	51	1.2	3.0	1,060	11153
B-35825-14C	●		2133	25	38	1.5	3.0	1,245	11157
B-35825-15C	●		2133	25	51	1.5	3.0	1,560	11158
B-35825-16C	●		2133	25	64	1.5	3.0	1,880	11159
B-35829-16C	●		2133	50	51	2.0	6.0	2,600	11169
B-35829-18C	●		2133	50	76	2.0	6.0	3,490	11170
B-35829-20C	●		2133	50	102	2.0	6.0	4,230	11171
B-35831-6C	●	SPCC	2133	50	102	3.0	10.0	7,500	11178
B-35821-8D	▲		1829	15	27	0.8	2.0	405	11140
B-35821-10D	●		1829	15	38	0.8	2.0	530	11141
B-35822-9D	●		1829	15	27	1.0	3.0	615	11142
B-35822-10D	●		1829	15	32	1.0	3.0	670	11143
B-35822-11D	●		1829	15	38	1.0	3.0	755	11144
B-35822-12D	●		1829	15	51	1.0	3.0	950	11145
B-35823-6D	●		1829	15	38	1.2	3.0	875	11150
B-35823-7D	▲		1829	15	51	1.2	3.0	1,115	11151
B-35825-14D		SPHC	2133	25	38	1.6	3.0	1,435	11154
B-35825-15D			2133	25	51	1.6	3.0	1,680	11155
B-35825-16D			2133	25	64	1.6	3.0	2,035	11156
B-35826-10D			2133	25	38	1.6	5.0	1,630	11160
B-35826-11D			2133	25	51	1.6	5.0	1,960	11161
B-35826-12D			2133	25	64	1.6	5.0	2,345	11162
B-35829-11D			2133	50	51	2.0	5.0	2,500	11163
B-35829-13D			2133	50	76	2.0	5.0	3,310	11164
B-35829-15D			2133	50	102	2.0	5.0	4,185	11165
B-35829-16D			2133	50	51	2.0	6.0	2,690	11166
B-35829-18D			2133	50	76	2.0	6.0	3,520	11167
B-35829-20D			2133	50	102	2.0	6.0	4,300	11168
B-35830-11D			2133	50	76	2.3	6.0	4,030	11172
B-35830-13D			2133	50	102	2.3	6.0	4,870	11173
B-35830-14D			2133	50	127	2.3	6.0	5,870	11174
B-35831-6D			2133	50	102	3.2	10.0	7,980	11175
B-35831-7D			2133	50	127	3.2	10.0	9,205	11176
B-35831-8D			2133	50	153	3.2	10.0	10,800	11177

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.