




C-1348-A
(노브식)
(Knob type)





C-1348-B
(슬릿식)
(Slitting type)


[C-1348-A]

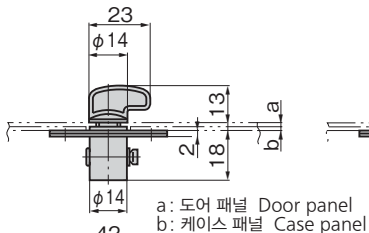

[C-1348-B]



패널 구멍 치수
Panel drilling dimensions



특징 Feature

- 스텐레스제로 내식성이 뛰어납니다.
- 코일 스프링 타입으로 내구성이 뛰어납니다.
- 오른쪽으로 90° 회전하면 조여지고, 왼쪽으로 90° 회전하면 열립니다.

- Corrosion-resistant stainless steel is used.
- It's a coil spring type for durability.
- To be tightened by turning 90° clockwise and to be loosened by turning 90° counterclockwise.

사양

- 표면 마무리: 광택 배럴 연마
- 적용 판 두께: 3.0mm(도어 패널 a+케이스 패널 b)
- 조임력: 22.5N(a+b=0mm)~44.1N(a+b=3.0mm)

용도

- 소형 케이스의 도어나 덮개

비고



- 도어 측에는 부속의 E-링으로 부착하십시오.
- 오래 사용하기 위해 정기적으로 접동부에 고 성능 윤활제를 도포하십시오.

Speci- fications

- Finish: Gloss barrel polishing
- Applicable panel thickness: 3.0mm (Door panel a + Case panel b)
- Tightening force: 22.5N(a+b=0mm) to 44.1N(a+b=3.0mm)

Specific use


Remarks




- Small case doors and covers
- Attach the accessory E-ring to the door panel.
- Regular coating of high-performance lubricant to the sliding parts.

부착 방법 Installation method

(C-1348-A)



(C-1348-B)



상품번호 Product No.	RoHS 10	비고 Remarks	재질 Material	제품질량(g) Mass	코드 Code
C-1348-A	●	노브식 knob type	스텐레스강 (SUS304)	30	22246
C-1348-B	●	슬릿식 slitting type	Stainless steel	30	22247

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.