





C-550-F


본체  
Main body

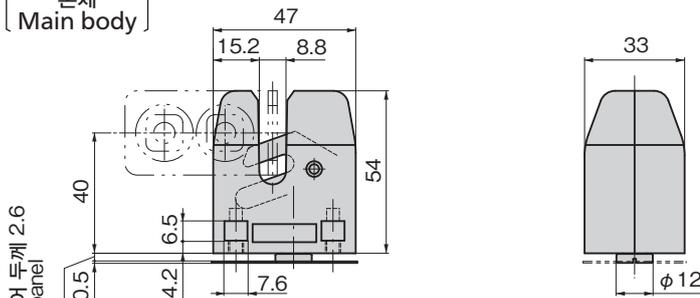


최대 적용 판 두께 2.6  
Applicable panel thickness

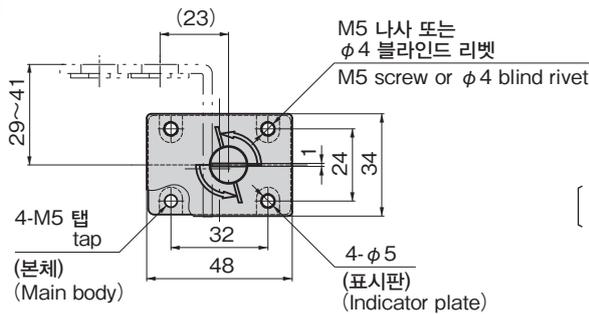


캐치  
Catch

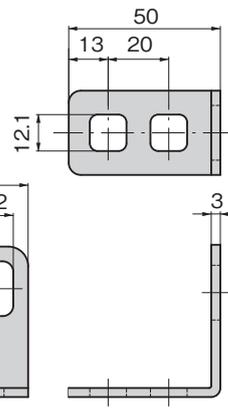


와셔  
Washer



패널 구멍 치수  
Panel drilling dimensions

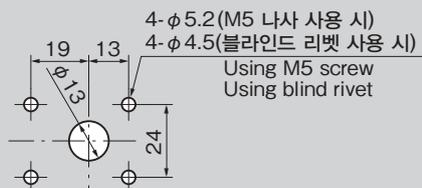

부착 예  
Example of installation

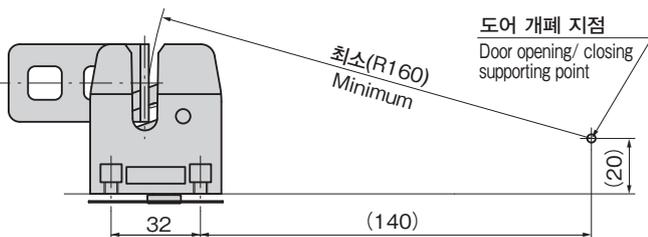

※위 그림과 같이 옆으로 부착하는 경우는 캐치가 본체에 간섭하지 않도록 부착 위치를 설정해 주십시오.  
※When fitting to the side as shown above, determine the position so that the bracket does not interfere with the unit.

특징 Feature

- 도어를 닫으면 원터치로 잠금 수 있습니다. 도어를 밀어서 닫을 수 있습니다.
- 잠금 해제에는 드라이버 등으로 돌려 주십시오.
- 잠금 해제 후 도어를 열 때까지 해제 상태를 유지하므로 하나의 도어에 복수로 사용할 수 있습니다.
- Single-touch locking when the door is closed. Pushing the door closes it.
- Unlock with a screwdriver or similar.
- The door remains unlocked after unlocking until it is opened, allowing the use of multiple locks on the same door.

사양	<ul style="list-style-type: none"> <li>• 재질: 본체/아연합금(ZDC) 스프레치·캐치/스테인레스 강판(SUS304) 회전 캠/스테인레스강 주물(SUS304) 표시판/알루미늄 합금(A5052)</li> <li>• 표면 마무리: 본체/배럴 연마 표시판/알루마이트 처리</li> <li>• 최대 적용 판 두께: 2.6mm</li> </ul>
용도	<ul style="list-style-type: none"> <li>• 대형기기의 점검구 도어·차량</li> </ul>
비고	<ul style="list-style-type: none"> <li>• φ4 블라인드 리벳으로 부착 시에는 리벳 치수를 확인한 후 사용해 주십시오.</li> </ul>

Specifications	<ul style="list-style-type: none"> <li>• Material: Main body: Zinc alloy (ZDC) Snatch/Catch: Stainless steel plate (SUS304) Rotating cam: Stainless steel casting (SUS304) Indicator plate: Aluminum alloy plate (A5052)</li> <li>• Finish: Main body: Barrel polishing Indicator plate: Alumite treatment</li> <li>• Max. applicable panel thickness: 2.6mm</li> </ul>
Specific use Remarks	<ul style="list-style-type: none"> <li>• Inspection doors for large equipment, trains</li> <li>• If installing with φ4 blind rivet, be sure to check rivet dimensions first.</li> </ul>

상품번호 Product No.	RoHS 10	제품질량(g) Mass	코드 Code
C-550-F		295	23776

- : RoHS 10 대응품
- ▲: RoHS10에 대응 가능합니다.