




특징 Feature

- 도어를 가볍게 밀면 닫히고, 다시 한 번 밀면 스프링 작동으로 도어가 열립니다.
- 자석을 사용하지 않으므로 자성을 싫어하는 장소에 최적입니다.
- Door closes with gentle push; pushing again causes spring action to open door.
- Does not use magnets, ideal for locations sensitive to magnetic fields.


사양	<ul style="list-style-type: none"> <li>• 재질: 본체/폴리아세탈(POM) 캐치/폴리아세탈(POM) 스페이서/스텐레스 강판(SUS304)</li> <li>• 표준색: 블랙</li> <li>• 유지력: 20N</li> </ul>
용도	<ul style="list-style-type: none"> <li>• 계측기기·분전반·캐비닛</li> </ul>
비고	<ul style="list-style-type: none"> <li>• 캐치는 별매했습니다.</li> <li>• 도어에 사용하는 경우 본체의 8mm 방향과 도어의 회전축 방향을 평행하게 부착하십시오.</li> <li>• 수직 방향으로 사용하는 경우 캐치와 도어의 회전축의 중심은 40mm 이상 떨어뜨리십시오.</li> <li>• 본체와 캐치의 중심 어긋남은 ±0.2mm 이내로 하십시오.</li> <li>• 스페이서는 판 두께가 2mm가 되도록 선택 하십시오.</li> <li>• 무리하게 빼지 마십시오.</li> </ul>

Specifications	<ul style="list-style-type: none"> <li>• Material: Main body: Polyacetal (POM) Catch: Polyacetal (POM) Spacer: Stainless steel sheet (SUS304)</li> <li>• Standard color: Black</li> <li>• Holding force: 20N</li> </ul>
Specific-use	<ul style="list-style-type: none"> <li>• Measurement equipment, distribution panels, cabinets</li> </ul>
Remarks	<ul style="list-style-type: none"> <li>• Catch sold separately.</li> <li>• When using on a door, install so 8mm dimension on main body is parallel with direction of rotation axis of door.</li> <li>• When using in a vertical orientation, ensure at least 40mm between catch and center of rotation axis of door.</li> <li>• The off-center tolerance between the main body and the catch should be within ±0.2mm.</li> <li>• Select spacers so that panel thickness reaches 2mm.</li> <li>• Do not unlatch forcefully.</li> </ul>

[CP-573]

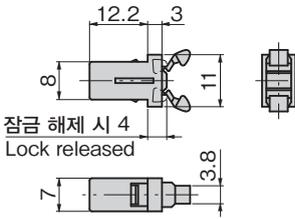


[CP-573SP]




※CP-573SP는 부착 시 품번 각인면을 CP-573, CP-573S-2의 래치 쪽으로 하십시오.  
※When installing CP-573SP, install so surface with product number faces gripping end of CP-573 or CP-573S-2.

[CP-573S-1]

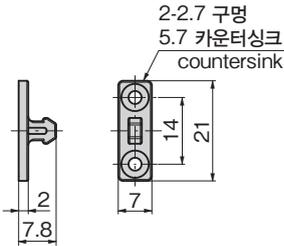


[CP-573S-2]




부착 치수  
Installation method


[CP-573S-1]

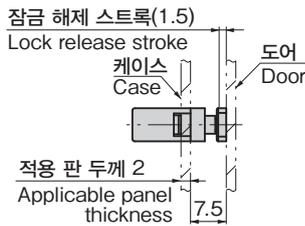

[CP-573S-2]

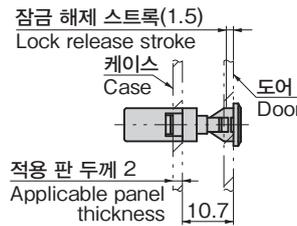

패널 구멍 치수 (CP-573, CP-573S-2)  
Panel drilling dimensions

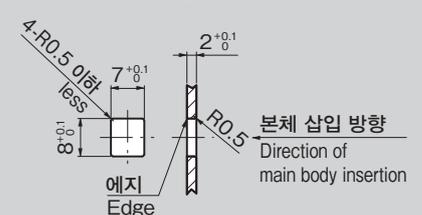

상품번호 Product No.	RoHS 10	비고 Remarks	제품질량(g) Mass	코드 Code
CP-573	●	본체 Main Body	0.9	24693
CP-573S-1	●	나사고정 캐치 Screw-fastening catch	0.4	24694
CP-573S-2	●	푸시인 캐치 Push-in catch	0.4	24695

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.

상품번호 Product No.	RoHS 10	비고 Remarks	t	제품질량(g) Mass	코드 Code
CP-573SP-1.6	●	스페이서 Spacer	0.4	0.5	24696
CP-573SP-1.2	●		0.8	1.0	24697
CP-573SP-1.0	●		1.0	1.2	24698

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.