





C-850-1



C-850-2



C-850-3



C-850-2S



C-850-4




C-850-5




C-1850-5

C-850-2S 용 스트라이커
Striker


[C-850-1]

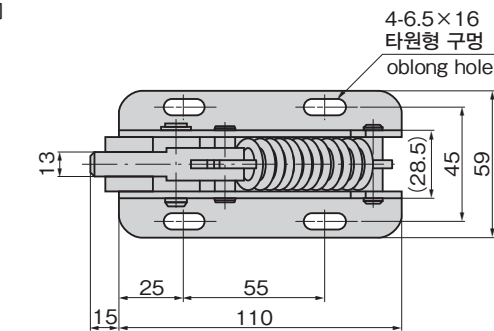

[C-850-2]

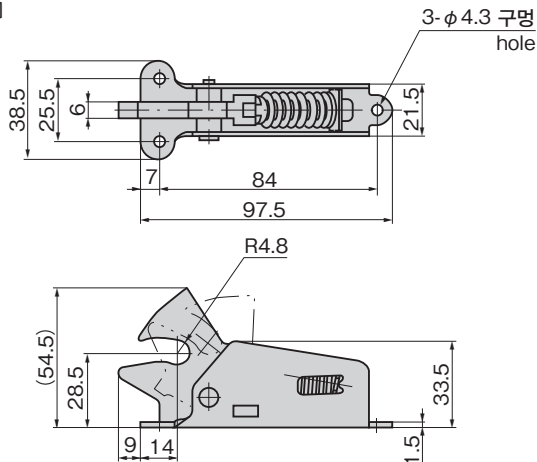

[C-850-3]

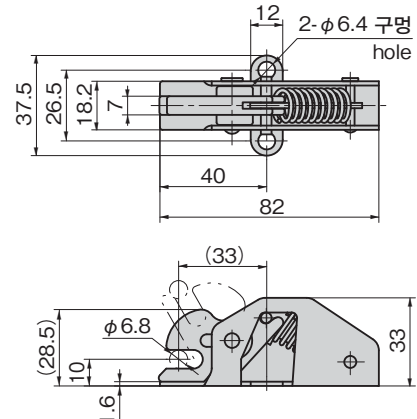

특징 Feature

- 도어는 원터치로 개폐할 수 있습니다.
- 스프링의 작동에 의해 강력하게 도어를 유지합니다.
- The door opens and closes by one touch.
- The door is held securely by the spring action.

[C-850-1·2·3]

- 사양
- 재질: 본체/냉간 압연 강판(SPCC) 후크부/폴리아미드 수지(PA)
 - 표면 마무리: 아연 도금 크로메이트 처리 (MFZn-C)

[C-850-4]

- 사양
- 재질: 본체/냉간 압연 강판(SPCC) 후크부/스텐레스강 주물(SUS304)
 - 표면 마무리: 아연 도금 절연 크로메이트 처리(MFZn-C)

[C-850-5]

- 사양
- 재질: 냉간 압연 강판(SPCC)
 - 표면 마무리: 아연 도금 크로메이트 처리 (MFZn-C)

[C-1850-5]

- 사양
- 재질: 스텐레스 강판(SUS304)
 - 표면 마무리: 배럴 연마
- 용도
- 특장차·버스·건설기계
- 비고
- 캐치는 별매입니다.
 - 스텐레스제(C-1850-5)도 있습니다. (C-850-5)
 - C-850-4S 쇼트 스톱퍼 타입도 있습니다.
 - 오래 사용하기 위해서 정기적으로 접동부에 윤활제를 도포해 주십시오.

[C-850-1·2·3]

- Speci-fications
- Material: Main unit: Cold rolled steel plate (SPCC) Hook: Polyamide resin (PA)
 - Finish: Zinc plating chromate treatment (MFZn-C)

[C-850-4]

- Speci-fications
- Material: Main unit: Cold rolled steel plate (SPCC) Hook: Cast stainless steel (SUS304)
 - Finish: Zinc plating green chromate treatment (MFZn-C)

[C-850-5]

- Speci-fications
- Material: Cold rolled steel plate (SPCC)
 - Finish: Zinc plating chromate treatment (MFZn-C)


[C-1850-5]

- Speci-fications
- Material: Stainless steel plate (SUS304)
 - Finish: Barrel polishing
- Speci-fication
- Specially equipped vehicles, buses, construction machinery
- Remarks
- The striker is optional.
 - Apply lubricant to sliding parts regularly for a long life.

상품번호 Product No.	RoHS 10	인장 해제력 N Tension and release force	제품질량(g) Mass	코드 Code
C-850-1		225	360	21368
C-850-2		127	110	21559
C-850-2S		127	190	21560
C-850-2S-Striker 용 스트라이커	●		120	22678
C-850-3	●	93	60	21561
C-850-4		120	190	22982
C-850-5	●	23	30	22193
C-1850-5	●	7.5	30	23551


●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.

[C-850-2S]

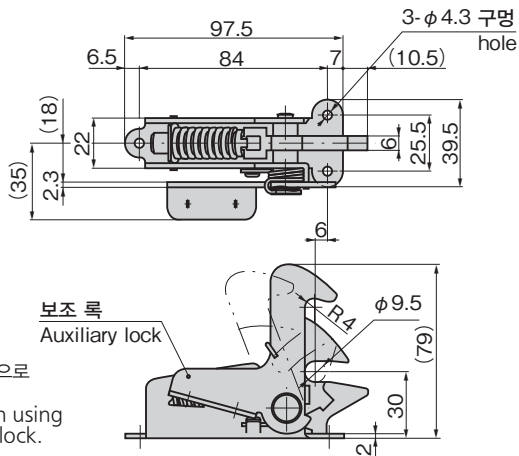


※보조 잠금 내장으로
안전 설계
※Safety design using
the auxiliary lock.


〔C-850-2S〕 용 스트라이커
Striker

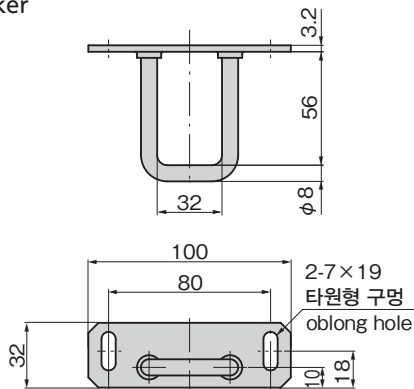


[C-850-4]

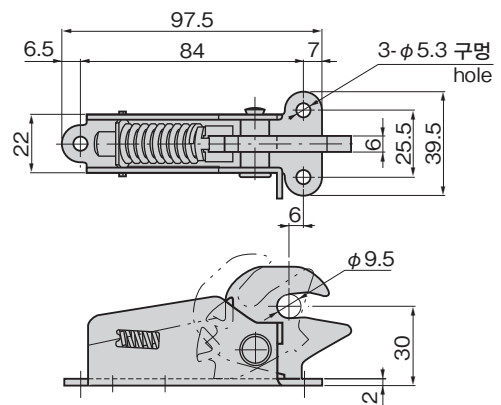

[C-850-5
C-1850-5]




C-850-5 부착 예
Example of installation

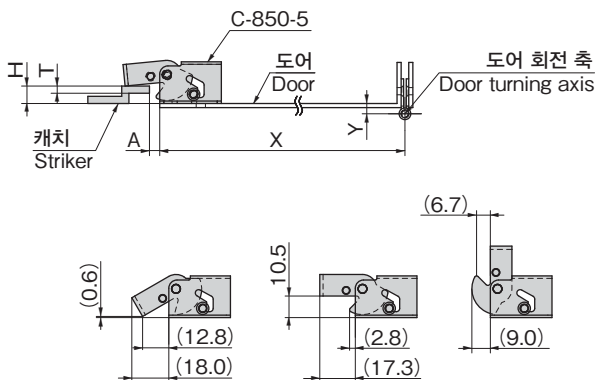

※ 도어 회전 축과 C-850-5의 부착 관계(X,Y) 및 개치의 치수 및 위치 관계(A,H,T)에 의해 도어 개폐 시에 간섭하기 때문에 주의하시기 바랍니다.
 ▶ 마찬가지로 도어 유지력도 변화하고 도어의 해제 오류와도 연결되기 때문에 충분한 검증도 수행하십시오.

※Note that the installed relationship between the door turning axis and C-850-5 (X, Y) as well as the dimensions and positional relationship of the striker (A, H, T) results in contact when opening/closing the door.
Similarly, this also affects the door holding force, and sufficient trial and adjustment should be carried out during installation to prevent the door from being able to unlock inadvertently.

작동 예
Example of
operation

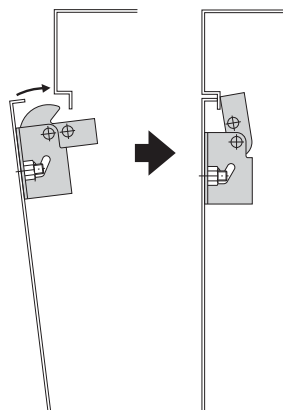

사용 예 Example of application

