

특징 Feature

- C-133・C-134 등의 300번 키 실린더 내장 래치 자물쇠와 호환성이 있습니다.
- KA-140・KA-1140 수도고속도로주식회사(일본)용과 조합해서 사용할 수 있습니다.
- 열쇠는 90° 회전으로 잠금 시에만 탈착할 수 있습니다.
- Compatible with C-133/134 No. 300 key cylinder-attached latches.
- Can be used with KA-140/1140 approved by Metropolitan Expressway company Limited.
- Key can be inserted/removed by turning 90° only when locking.



C-334

키 No.300
Key

※No.700도 제작합니다.

- | | |
|----|---|
| 사양 | ● 재질: 본체/아연합금(ZDC)
키/ 황동판(C3713P) |
| | ● 표면 마무리: 본체/크롬 도금(MZCr)
키/니켈 도금(MBNi) |
| 용도 | ● 열쇠가 다른 타입 수: 최대 9가지 |
| 비고 | ● 부속품: 키 2개・스톱퍼 |
| | ● 계측기기・분전반・각종 박스 |
| | ● M19 조임 권장 토크: 6.86N・m |

Speci-
fications

- Material: Main body: Zinc alloy (ZDC)
Key: Brass plate (C3713P)
- Finish: Main body: Chrome plating (MZCr)
Key: Nickel plating (MBNi)
- No. of max. key differences: 9
- Accessories: Two keys and stopper plate

Speci-
fication

- Measuring equipment, distribution boards and various boxes


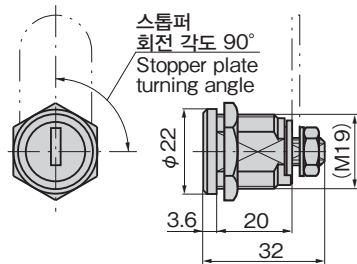



Remarks

- Recommended M19 tightening torque: 6.86N・m

상품번호 Product No.	RoHS 10	제품질량(g) Mass	코드 Code
C-334 동번 keyed alike	●	62	22182
C-334 열쇠 다른 key differences	●		22183

●: RoHS10 대응품

▲: RoHS10에 대응 가능합니다.

패널 구멍 치수
Panel drilling dimensions판 두께 t=2.3
Plate thickness