

키 No.TAK60
Key

C-34-TAK60

특징 Feature

- 열쇠는 90° 회전으로 잠금 시·해제 시에 모두 탈착할 수 있습니다.
- Key can be inserted/removed by turning 90° both when locking and unlocking.

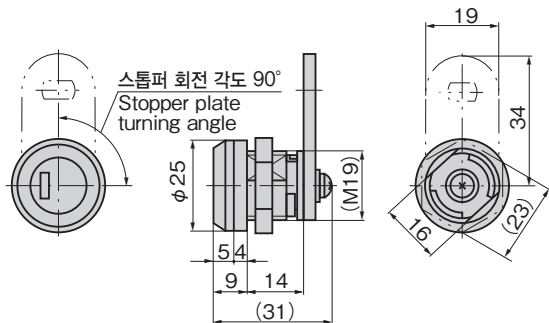


사양	● 재질: 본체/아연합금(ZDC) 키/ 황동판(C3713P) ● 표면 마무리: 본체/크롬 도금(MZCr) 키/니켈 도금(MBNi) ● 부속품: 키 2개·스톱퍼
용도	● 자동판매기·옥외용 분전반·소형 방범기기·도시가스 경보기
비고	● 열쇠가 다른 타입도 제작합니다. 문의해 주십시오. ● M19 조임 권장 토크: 6.86N·m ● 두께 4mm인 랑을 제거해도 사용할 수 있습니다. 스톱퍼 부착 위치는 14mm→18mm로 됩니다.

Specifications	● Material: Main body: Zinc alloy (ZDC) Key: Brass plate (C3713P) ● Finish: Main body: Chrome plating (MZCr) Key: Nickel plating (MBNi) ● Accessories: Two keys and stopper plate
Specific-use	● Vending machines, outdoor distribution boards, small burglarproof equipment and city gas alarms
Remarks	● Recommended M19 tightening torque: 6.86N·m ● Can also be used with 4mm-thickness ring removed. Mounting position of stopper plate changes 14mm→18mm.

상품번호 Product No.	RoHS 10	제품질량(g) Mass	코드 Code
C-34-TAK60	●	66	23681
C-34	●		20268
C-34-C-TAK60	●		23682
C-34-C	●		23615

●: RoHS10 대응품

▲: RoHS10에 대응 가능합니다.

키 No.0200
Key패널 구멍 치수
Panel drilling dimensions판 두께 t=3.2
Plate thickness