LE-60

AC 솔레노이드 록(통전 시 해제형)

AC SOLENOID LOCKS (UNLOCKED WHEN TURNED ON)

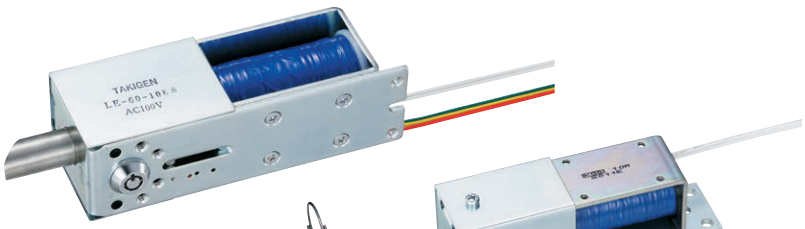

LE-60-10-ES

키 No.T750
Key

LE-60-11

특징 Feature

- 솔레노이드 록의 교류 타입
- 래치기구(자동 잠금 타입)
- 원격 조작으로 해제할 수 있습니다.
- 앞면•뒷면 부착 겸용(앞면 장착 시에는 커버를 분리하여 작업하십시오.)
- 통전 중이 아니라도 해제할 수 있는 비상 해제용 자물쇠를 포함합니다. (LE-60-E•ES)
- 잠금/해제 신호로 확인할 수 있습니다. (LE-60-S•ES)

- The AC type of the solenoid lock.
- The latch mechanism is incorporated. (auto-locking type)
- Can be operated with a remote control.
- Both front and rear surface attachment. (remove the cover when choosing the front surface attachment)
- Equipped with emergency lock release mechanism for unlocking when not energized. (LE-60-E•ES)
- Locking/unlocking can be checked the signal. (LE-60-S•ES)

〔LE-60-10〕

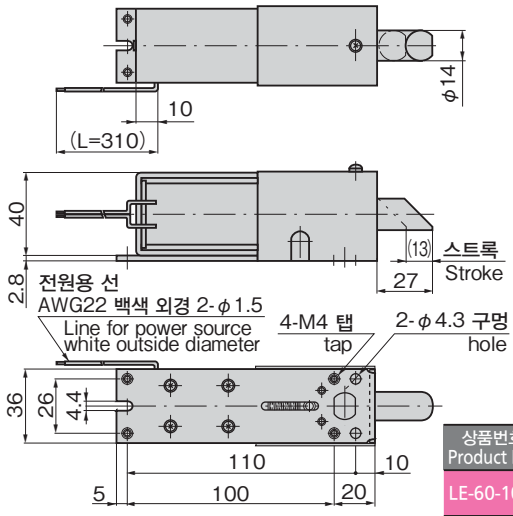

상품번호 Product No.	비고 Remarks
LE-60-10-E	비상 해제용 자물쇠 부착 With emergencyunlocking device
LE-60-10-S	잠금/해제 확인 스위치 부착 Withlocking/unlocking check switch
LE-60-10-ES	비상 해제용 자물쇠, 잠금/해제 확인 스위치 부착 With emergency unlocking device/With locking/unlocking check switch

〔LE-60-10-E
LE-60-10-ES
LE-60-10-S〕 ※본 그림은 LE-60-ES입니다.

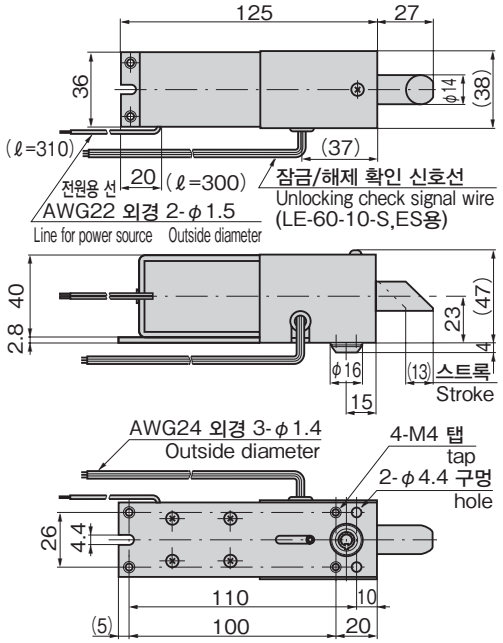

잠금: 황-녹
Locking: Yellow-green
해제: 황-적
Unlocking: Yellow-red

비상 해제용 자물쇠
Emergency
unlocking device
(LE-60-10-E,ES용)



〔LE-60-11〕

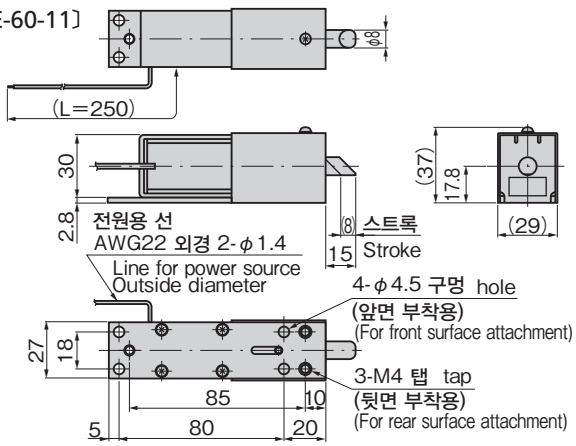

사양	• 통전율: 100%(연속정격) • 사용 주위 온도: -5 ~ +40℃(동결하지 않을 것) • 사용 주위 습도: 85%RH 이하(결로가 없을 것) • LE-60-10-S•ES용 스위치 정격(저항 부하): AC125V•1A, DC30V•0.5A
용도	• 패스박스•각종 기기
비고 ⚠	• 바리스터 내장 • AC100V 이외의 사양은 특주입니다. DC24V 타입은 LE-30(1436~1438페이지)을 참조하십시오. • 본 제품의 래치 스트록 및 당기는힘, 압출력은 수평 부착 시의 값입니다. • 주위 온도 40℃에서 코일 온도 상승분이 약 65℃가 되는 소비전력을 정격전압(연속정격)으로 합니다. • 솔레노이드에 연속 통전하면 고온(70℃ 전후)이 됩니다. 손이 닿을 우려가 있는 경우에는 방열을 고려한 후 화상 방지 처치를 하십시오. • 통전 작동 시에는 래치에 대한 부하를 제거하십시오. • 잠금/해제는 자물쇠의 구조상 열쇠로 밀면서 돌려 주십시오.

Specifications	• Duty cycle: 100% (continuous rating) • Ambient temperature: -5℃ to +40℃ (non-condensing) • Operating humidity range: 85%RH or less (non-dewing) • Verification switch rated (LE-60-10-S/ES) (resistance load): AC125V, 1A/DC30V, 0.5A
Specific use	• Pass boxes and various cases
Remarks ⚠	• These products are built in varistor. • The latch stroke, the retraction force and the extension force are value in the horizontal installation. • The rated voltage (continuous rating) is at a power consumption that causes the temperature of the coil to reach 65℃ when the ambient temperature is 40℃. • When continuously energized, the solenoid becomes hot (around 70℃). If there is a risk of it being touched, measures should be taken to prevent burns with consideration given to heat radiation. • Remove the load on the latch when operating electrically. • The construction of the emergency unlocking mechanism requires that the key be pushed in and then turned.

상품번호 Product No.	RoHS 10	정격전압(연속정격) Rated Voltage (continuous)	소비전력 Power consumption	최대한도 전압(1분간) Withstand voltage (per minute)	래치 인입력(수평 시) N Latch retraction force (horizontal)	래치 압입력(수평 시) N Latch extension force (horizontal)	제품질량(g) Mass	코드 Code
LE-60-10		AC100V±5%	9.6W	AC1500V	2.4	3.7	651	50205
LE-60-10-E		AC100V±5%	9.6W	AC1500V	2.4	3.7	651	50206
LE-60-10-S		AC100V±5%	9.6W	AC1500V	2.4	3.7	651	50207
LE-60-10-ES		AC100V±5%	9.6W	AC1500V	2.4	3.7	651	50208
LE-60-11	●	AC100V±5%	6W	AC1500V	1.4	2.1	296	50212

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.