




S-19-90-E-1



키 No.R0220
Key

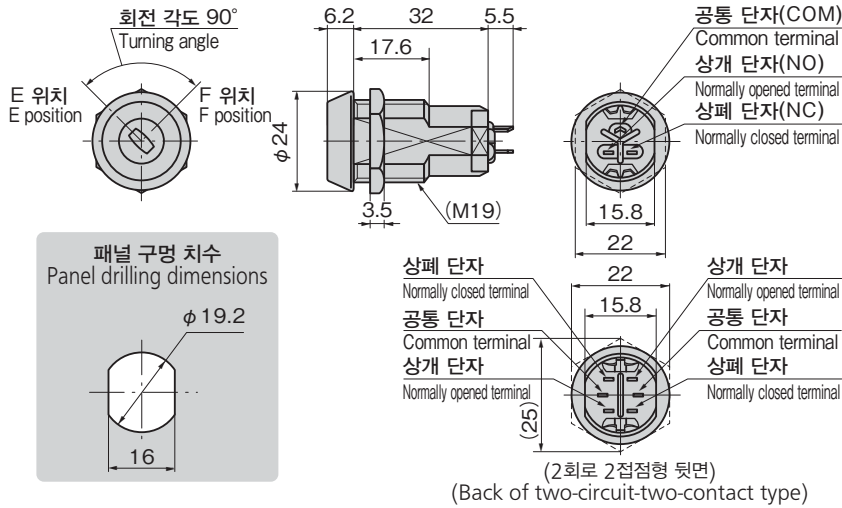

상품명 Product No.	RoHS 10	코드 Code
S-19-90-E-1 동번 keyed alike	●	40211
S-19-90-E-1 열쇠 다름 key differences		40212
S-19-90-E-2 동번 keyed alike		40215
S-19-90-EF-1 동번 keyed alike		40213
S-19-90-EF-1 열쇠 다름 key differences		40214
S-19-90-EF-2 동번 keyed alike		40217

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.

접점 구성표
Contact structures table

● 표시의 위치는 열쇠를 탈착할 수 있습니다.
Position of mark (●) shows that key can be inserted/removed.


상품명 Product No.	열쇠 회전 각도 Key turning angle	E 위치 E position	F 위치 F position
S-19-90-E-1 (1회로 2접점형) (one-circuit-two-contact type)	90° E 위치 E position	SW COM NO NC	SW COM NO NC
S-19-90-EF-1 (1회로 2접점형) (one-circuit-two-contact type)	90° E 위치 E position	SW COM NO NC	SW COM NO NC
S-19-90-E-2 (2회로 2접점형) (two-circuit-two-contact type)	90° E 위치 E position	SW1 COM NO NC SW2 COM NO NC	SW1 COM NO NC SW2 COM NO NC
S-19-90-EF-2 (2회로 2접점형) (two-circuit-two-contact type)	90° E 위치 E position	SW1 COM NO NC SW2 COM NO NC	SW1 COM NO NC SW2 COM NO NC

특징 Feature

- 리버시블 키 채용
- 방진 셔터 내장
- Reversible key
- Lock has dustproof shutter

사양	- 재질: 본체·키·실린더 자물쇠부/아연합금(ZDC) (본체, 스텐레스 커버 포함) - 표면 마무리: 본체·실린더 자물쇠부/아연 도금 크로메이트 처리(MZZn-C) 키/니켈 도금(MZNi) - 열쇠 번호: R0220 - 동일한 열쇠 번호·열쇠가 다른 타입도 있습니다. - 부속품: 키 2개 - 제품질량: 55g
용도	컴퓨터 주변기기·각종 전원 스위치
스위치부 특성	- 정격: AC125V·3A(저항 부하) DC30V·3A(저항 부하) - 최소 적용 부하: DC5V·100mA(저항 부하) - 접촉 저항: 20mΩ 이하(초기치) - 절연 저항: 100MΩ 이상(500VDC) - 내전압: (50/60Hz, 1분간) 비연속 단자 사이 AC1000V 각 단자와 비충전 금속부 사이 AC1500V - 내구성: 기계적 3만회 이상 전기적 15,000회 이상 - 접점 재료: 은 도금 - 사용 주위 온도: -20 ~ +70°C(동결하지 않을 것) - 사용 주위 습도: 85%RH 이하(결로가 없을 것) - 내진동: 10~55Hz 복진폭 1.5mm - 내충격: 30G 이상
비고	저항 부하가 작은 타입은 문의해 주십시오.

Specifications	- Material: Main body, cylinder and lock: Zinc alloy (ZDC) (Main body with stainless steel cover) - Finish: Main body and lock: Zinc plating chromate treatment (MZZn-C) Key: Nickel plating (MZNi) - Key No.: R0220 - Keyed alike and key differences are available. - Accessories: Two keys - Mass: 55g
Specific use	- Computer peripherals and various power switches - Rated: AC125V 3A (resistance load) DC30V 3A (resistance load) - Min. applicable load: DC5V 100mA (resistance load) - Contact resistance: 20mΩ or less - Insulation resistance: 100MΩ or more (500VDC) - Withstand voltage: (50/60 Hz, one minute) Between non-continuous terminals: AC1000V Between each terminal and non-charged metal: AC1500V - Durability: Mechanical: 30,000 time or more Electrical: 15,000 time or more - Contact material: Silver plating - Ambient temperature: -20°C to +70°C (non-freezing) - Operating humidity range: 85%RH or less (non-condensing) - Vibration resistance: 10 to 55Hz multiple-amplitude 1.5mm - Impact resistance: 30G or more
Switch characteristic	

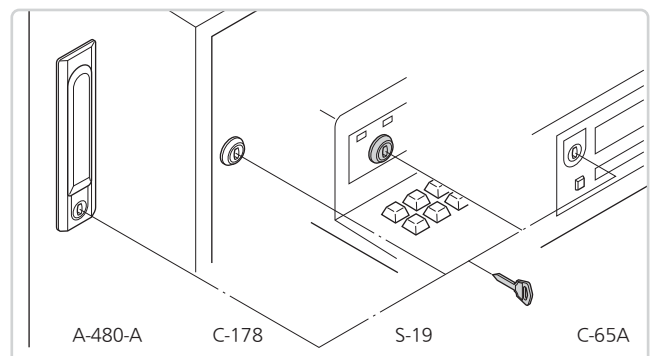

1개의 키로 큐비클·코인 록·키 스위치의 도어 관리가 가능합니다.
A single key can control all doors of cubicle, coin lock and keyswitch.