



S-34-E90-EF-1G


키 No.3413
key

특징 Feature

- 키 회전 범위, 탈착 위치는 45° 단위로 제작 가능합니다.
- Key turning range and inserted/removed position are available at 45° step.

사양	• 재질: 본체/아연합금(ZDC) 키/ 황동판(C2801P) • 표면 마무리: 본체/크롬 도금(MZCr) 키/니켈 도금(MBNi) • 부속품: 키 2개
용도	• 레지스터·컴퓨터·전원장치
납기	• 표준품...납기는 문의해 주십시오
스위치부 특성	• 정격: DC28V·100mA (최소 DC20mV·10μA) • 접촉 저항: 100mΩ 이하 • 절연 저항: 100MΩ 이상(DC250VDC) • 내전압: (50/60Hz, 1분간) 비연속 단자 사이 AC200V 각 단자와 비충전 금속부 사이 AC1500V • 내구성: 기계적 3만회 이상 전기적 15,000회 이상 • 접점 재료: 금 도금
비고	• 특수 사양(키 회전 범위·탈착 위치·스위치 구성 등)도 제작합니다.

Specifi- cations	• Material: Main body: Zinc alloy (ZDC) Key: Brass plate (C2801P) • Finish: Main body: Chrome plating (MZCr) Key: Nickel plating (MBNi) • Accessories: Two keys
Specific use	• Registers, computers and power supplies
Switch characte- ristic	• Rated: DC28V 100mA (min. DC20mV 10μA) • Contact resistance: 100mΩ or less • Insulation resistance: 100MΩ or more (DC250VDC) • Withstand voltage: (50/60 Hz, one minute) Between non-continuous terminals: AC200V Between each terminal and non-charged metal: AC1500V • Durability: Mechanical: 30,000 times or more Electrical: 15,000 time or more • Contact material: Gold plating

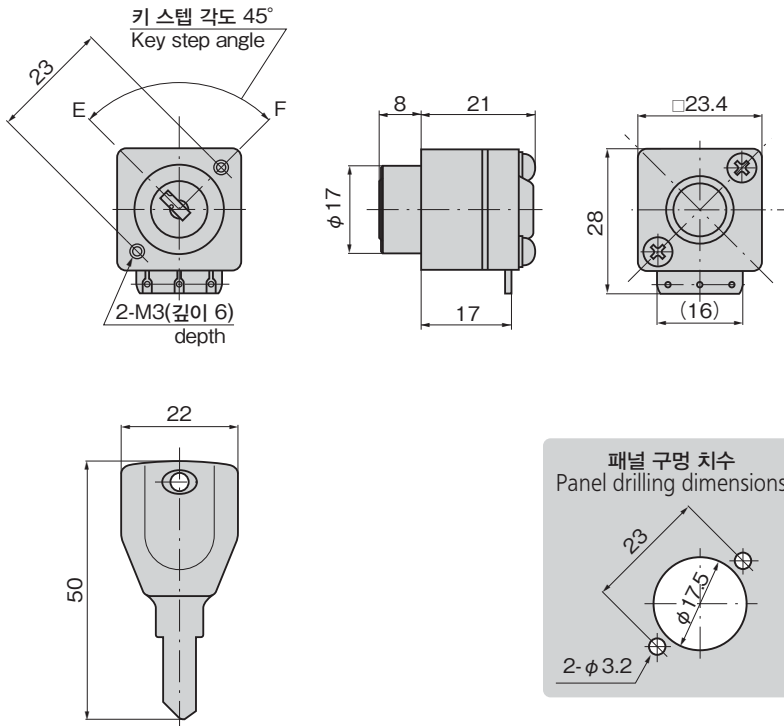

접점 구성표 Contact structures table

상품번호 Product No.		E	F
S-34-E90-EF-1G	SW1	COM 1 2	COM 1 2

상품번호 Product No.	RoHS 10	제품질량(g) Mass	코드 Code
S-34-E90-EF-1G		68	40358

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.