

S-21
활동제




S-21-30-B



상품명 Product No.	RoHS 10	제품질량(g) Mass	코드 Code
S-21-30-B	▲	35	40324
S-21-30-BC	▲	35	40325

●: RoHS10 대응품
▲: RoHS10에 대응 가능합니다.

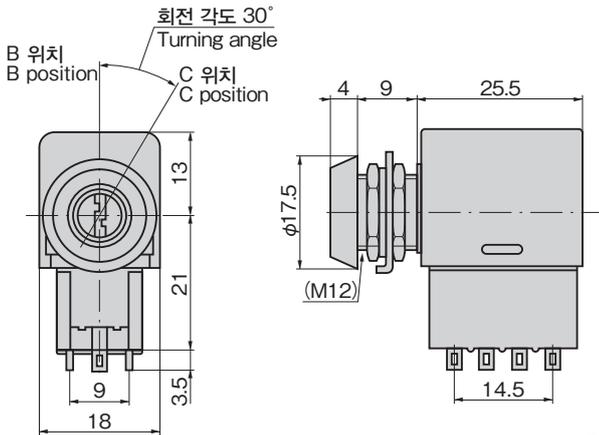

특징 Feature

- 접점 저항이 작고 적은 전류로도 확실하게 작동
- Small contact resistance allows it to operate with a very small current.

사양	<ul style="list-style-type: none"> ● 재질: 본체/괘삭 황동봉(C3604BD) 키/황동판(C2801P) ● 표면 마무리: 본체·키/니켈 도금(MBNI) ● 동일 열쇠 번호 한정 ● 부속품: 키 2개
용도	<ul style="list-style-type: none"> ● 각종 컴퓨터·전원장치
스위치부 특성	<ul style="list-style-type: none"> ● 정격: 6A용 AC125V·6A/AC250V·3A ● 최소 적용 부하: DC12V·10mA(저항 부하) ● 접촉 저항: 10mΩ 이하 ● 절연 저항: 1000MΩ 이상(DC500V 메가) ● 내전압: (50/60Hz, 1분간) 단자-접지 사이 AC1500V 단자-단자 사이 AC1000V ● 내구성: 기계적 10만회 이상 전기적 25,000회 이상 ● 전환 점접: 4극 쌍투입 점접
비고	<ul style="list-style-type: none"> ● 1A용 AC125V·1A/DC28V·50mA, 3A용 AC125V·3A/AC250V·3A도 제작할 수 있습니다.

Specifications	<ul style="list-style-type: none"> ● Material: Main body: Free cutting brass bar (C3604BD) Key: Brass plate (C2801P) ● Finish: Main body and Key: Nickel plating (MBNI) ● Keyed alike only ● Accessories: Two keys
Specific use	<ul style="list-style-type: none"> ● Various computers and power supplies ● Rated: For 6A: AC125V 6A/AC250V 3A ● Min. applicable load: DC 12V 10mA (resistance load) ● Contact resistance: 10mΩ or less ● Insulation resistance: 1000MΩ or more (DC500V mega) ● Withstand voltage: (50/60 Hz, one minute) Between terminal and ground: AC1500V Between terminals: AC1000V ● Durability: Mechanical: 100,000 times or more Electrical: 25,000 times or more ● Switch contact: Four-pole double-throw
Switch characteristic	

접점 구성표

Contact structures table

● 표시의 위치는 열쇠를 탈착할 수 있습니다.
Position of mark (●) shows that key can be inserted/removed.

상품명 Product No.	열쇠 회전 각도 Key turning angle	B 위치 B position	C 위치 C position
S-21-30-B		<ul style="list-style-type: none"> ● SW1: COM, NO, NC SW2: COM, NO, NC SW3: COM, NO, NC SW4: COM, NO, NC 	<ul style="list-style-type: none"> SW1: COM, NO, NC SW2: COM, NO, NC SW3: COM, NO, NC SW4: COM, NO, NC
S-21-30-BC		<ul style="list-style-type: none"> ● SW1: COM, NO, NC SW2: COM, NO, NC SW3: COM, NO, NC SW4: COM, NO, NC 	<ul style="list-style-type: none"> ● SW1: COM, NO, NC SW2: COM, NO, NC SW3: COM, NO, NC SW4: COM, NO, NC

