



S-510-1


S-510-K
(열쇠는 별매입니다.)
(Key is optional.)

특징 Feature

- 사용하는 열쇠로 회전 범위를 제어합니다.
- 열쇠의 탈착은 0위치에서 가능합니다.
- 옵션으로 마이크로 스위치의 부착이 가능합니다.
- Turning range is controlled with the key used.
- Key can be inserted/ removed at 0-position or 1-position.
- Attachment of microswitch is optional.

사양	• 재질: 본체/PBT·POM - 키/냉간 압연 강판(SPCC) • 표면 마무리: 본체/플레인 - 키/니켈 도금(MFNi) • 표준색: 블랙 • 제품질량: S-510-1/12g
용도	• 레지스터·컴퓨터·전원장치
납기	• 특주품...납기는 문의해 주십시오
스위치부 특성	• 정격: DC24V·10mA • 접촉 저항: 160mΩ 이하 • 절연 저항: 100MΩ 이상(DC500V 메가) • 내전압: (50/60Hz, 1분간) - 비연속 단자 사이 AC500V - 각 단자와 비충전 금속부 사이 AC500V • 내구성: 기계적 5만회 이상 • 전환 점접: 2회로 9접점(최대)형 • 정전내압: 15kV • 접점 재료: 금 도금

Specifi-cations	• Material: Main body: PBT/POM - Key: Cold rolled steel plate (SPCC) • Finish: Main body: Plain - Key: Nickel plating (MFNi) • Standard color: Black • Mass: S-510-1: 12g
Specific use	• Registers, computers and power supplies • Rated: DC24V 10mA • Contact resistance: 160mΩ or less • Insulation resistance: 100MΩ or more (DC500V mega) • Withstand voltage: (50/60 Hz, one minute) - Between non-continuous terminals: AC500V - Between each terminal and non-charged metal: AC500V • Durability: Mechanical: 50,000 times or more • Switch contact: Two-circuit-nine-contact (max.) • Electrostatic resistance: 15kV • Contact material: Gold plating
Switch character-istic	

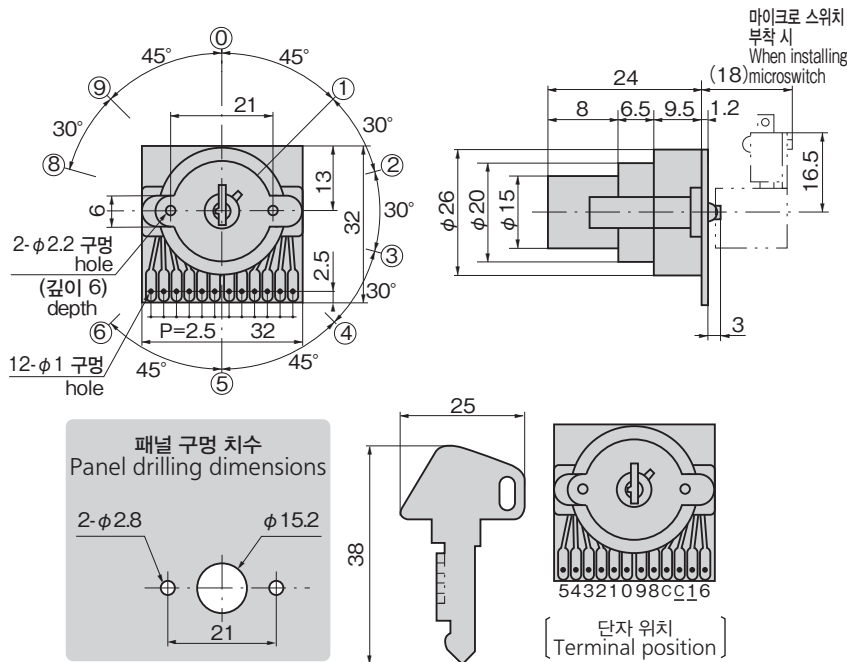

키 포지션 Key position	키 탈착 Key inserted /removed	접점 구성 Contact structure	마이크로 SW (옵션) Microswitch
0	○		COM-NC O-NO
1	○		COM-O-NC -NO
2	×		COM-O-NC -NO
3	×		COM-O-NC -NO
4	×		COM-O-NC -NO
9	×		COM-O-NC -NO
8	×		COM-O-NC -NO

상품번호(열쇠 번호) Product No. (Key No.)	RoHS 10	회전 범위(포지션) Turning range (position)	코드 Code
S-510-1 본체			40307
S-510-1-K(1RG)	●	0~1	70531
S-510-1-K(1X)	●	0~2	70532
S-510-1-K(1Z)	●	0~3	70533
S-510-1-K(1U)	●	0~4	70534
S-510-1-K(1P)	●	9~0	70535
S-510-1-K(1M)	●	8~3	70536

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.