

K-1508
스텐레스제 회전 차륜**K-1558**
스텐레스제 고정 차륜**K-508**
철제 회전 차륜**K-558**
철제 고정 차륜**저상 중하중용 캐스터**
SWIVEL AND RIGID CASTERS

특징 Feature

- 선회 부분은 표면 경화 담금질처리
- 내유·내약품·내마모성·내열성(-40 ~ 120℃)이 뛰어난 MC 나일론 사용
- Swivel head is hardened.
- MC-nylon is oil-resistant, chemicals-resistant, wear-resistant and heat-resistant (-40°C to +120°C).

사양	[K-1508·K-1558]
	• 재질: 본체/냉간 압연 스텐레스 강판(SUS304) 차륜/MC 나일론(블루) • 표면 마무리: 전해 연마
용도	[K-508·K-558]
	• 재질: 본체/열간 압연 강판(SPHC) 차륜/MC 나일론(블루) • 표면 마무리: 본체/열처리 도장(블랙)
납기	• 대형·중형의 기기
비고	• 표준품...납기는 문의해 주십시오
	• MC 나일론(블랙)제도 있습니다.
	• 본체 백색 도장도 가능합니다.

Speci- fications	[K-1508·K-1558]
	• Material: Main body: Cold rolled stainless steel plate (SUS304) Wheel: MC-nylon (Blue) • Finish: Electrolytic machining
Specific use	[K-508·K-558]
	• Material: Main body: Hot rolled steel plate (SPHC). Wheel: MC-nylon (Blue) • Finish: Main body: Baked (Black)
Remarks	• Large or middle-sized equipment • MC-nylon (Black) is available. • White painting main body is available.




K-1508-50








K-558-75

[K-508]

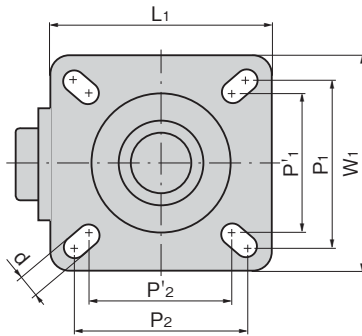

[K-558]

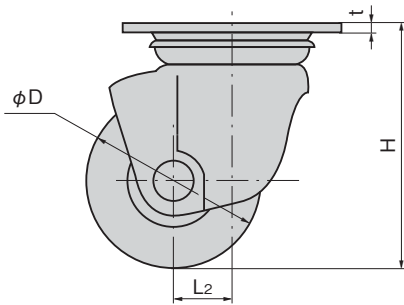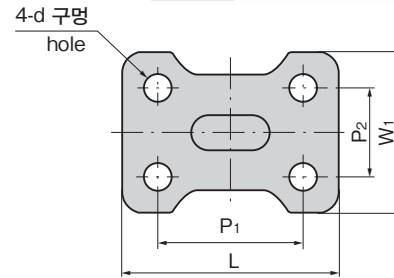

상품번호 Product No.	RoHS 10	재질 Material	비고 Remarks	φD	H	L ₁ ×W ₁	P ₁ ×P ₂	P' ₁ ×P' ₂	L ₂	W ₂	t	d	허용 하중 kN Allowable load	제품질량(g) Mass	코드 Code
K-1508-50	●	SUS	회전 Swivel	50	78	82×82	65×65	55×55	18	32.5	3.0	9.5	2.94	580	31675
K-1508-65	●			65	96.5	100×100	78×78	63×63	22	36	4.0	10.5	3.92	1,070	31676
K-1508-75	●			75	108	100×100	78×78	63×63	25	39	4.0	10.5	4.90	1,190	31677
K-508-50	●	SPCC	회전 Swivel	50	78	82×82	65×65	55×55	18	32.5	3.2	9.5	2.94	600	31024
K-508-65	●			65	96.5	100×100	78×78	63×63	22	36	4.0	10.5	3.92	1,010	31025
K-508-75	●			75	108	100×100	78×78	63×63	25	39	4.0	10.5	4.90	1,260	31026
K-1558-50	●	SUS	고정 Rigid	50	78	85×58	55×28			32.5	3.0	φ9.5	2.94	340	31678
K-1558-65	●			65	96.5	86×59	55×28			36	4.0	φ10.5	3.92	590	31679
K-1558-75	●			75	108	95×72	63×40			39	4.0	φ10.5	4.90	760	31680
K-558-50	●	SPCC	고정 Rigid	50	78	85×58	55×28			32.5	3.2	φ9.5	2.94	370	31027
K-558-65	●			65	96.5	86×59	55×28			36	3.8	φ10.5	3.92	570	31028
K-558-75	●			75	108	95×72	63×40			39	3.8	φ10.5	4.90	750	31029

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.