K-100HB₂ 철제 회전 차륜 / K-600HB₂ 철제 고정 차륜

RoHS 10

중량용 저상형 캐스터
HEAVY-DUTY LOW-PROFILE CASTERS

K-100HB₂S-65-EP

K-100HB₂-50-PA

K-600HB₂-65-EP

〔K-100HB₂〕

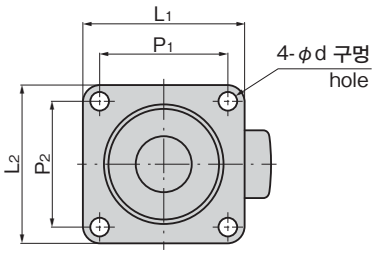

〔K-600HB₂〕

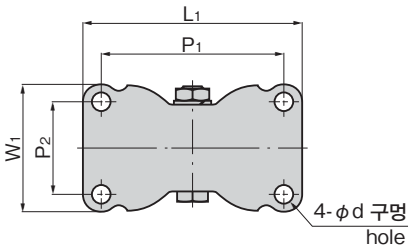

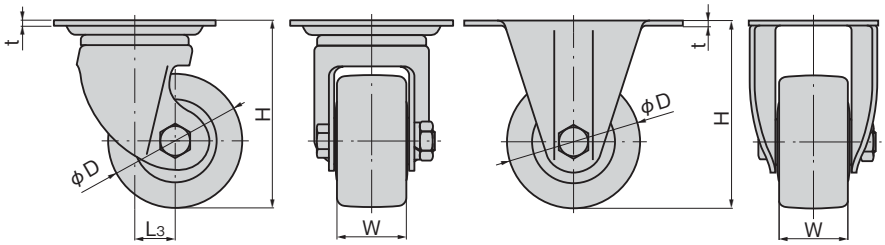

특징 Feature

〔P.A 폴리우레탄 차륜〕
- 금속보다 우수한 내마모성 탄성이 커서 적재물에 충격을 주지 않습니다. 장기간 고정되어 있어도 하중으로 인한 변형이 남지 않습니다.
- 소음이 적고 조용하여 바닥에 손상을 주지 않습니다. 휠 허브에 알루미늄, 부쉬에 고성능 엔지니어링 플라스틱을 채용하여 경량화를 실현.
- 바닥에 친화적이고 차륜 회전부에 레이디얼 베어링을 2개 사용, 양단 지지 구조로 기동성이 뛰어납니다.

〔E.P 엔지니어링 플라스틱 차륜〕
- 내충격성이 좋고 가혹한 사용에도 견딜 수 있고 경량입니다.
- 내후성·내한성·내약품성이 뛰어납니다.
- 차륜 회전부에 레이디얼 베어링을 2개 사용, 양단 지지 구조로 기동성이 뛰어납니다.

〔Polyurethane wheel〕
- It's wear-resistant, elastic and superior to metal. It has large elasticity so impact on load is minimum. Load caused distortions when fixed for long periods do not occur.
- It's minimum noise, rather quiet and it does not damage the floor. And it features lightweight because aluminum is used for wheel hub and high-performance engineering plastic is used for bushing.
- It's friendly to floor. Two radial bearings are incorporated in the wheel axle and both-end support structure contributes to maneuverability.

〔Engineering plastic wheel〕
- Impact-resistant and durable against heavy-duty use and lightweight
- Heat-proof, cold-proof and chemicals-proof
- Two radial bearings are incorporated in the wheel axle and both-end support structure contributes to maneuverability.

사양	● 재질: 본체/냉간 압연 강판(SPCC) 차륜/폴리우레탄 수지·엔지니어링 플라스틱 ● 표면 마무리: 본체/아연 도금 흑색 크로메이트 처리(MFZn-C) ● 표준색: 블랙
용도	● 컴퓨터·복사기·계측기기·정밀기기
납기	● 표준품···납기는 문의해 주십시오

Specifications	● Material: Main body: Cold rolled steel plate (SPCC) Wheel: Polyurethane resin/Engineering plastic ● Finish: Main body: Zinc plating black chromate treatment (MFZn-C) ● Standard color: Black
Specific-use	● Computers, photocopiers, measuring and precision equipment

상품번호 Product No.	RoHS 10	비고 Remarks	ϕD	H	L₁×L₂	P₁×P₂	L₃	W	t	ϕd	선회 반경 Slewing radius	허용 하중 kN Allowable load	제품질량(g) Mass	코드 Code
K-100HB₂-40-EP	●	스톱퍼 없음 Without stopper	40	60	58×58	44×44	14	25	2.3	6.5	35	1.96	265	31044
K-100HB₂-40-PA	●	스톱퍼 없음 Without stopper									35		275	31042
K-100HB₂-50-EP	●	스톱퍼 없음 Without stopper	50	72	64×64	50×50	20	28	2.6		46	2.45	423	31045
K-100HB₂-50-PA	●	스톱퍼 없음 Without stopper									46		438	31043
K-100HB₂-65-EP	●	스톱퍼 없음 Without stopper	65	92	90×90	71×71	22	38	3.2	10.5	56	2.94	920	31046
K-100HB₂S-65-EP	●	스톱퍼 부착 With stopper									68		965	31052
K-100HB₂-75-EP	●	스톱퍼 없음 Without stopper	75	106							61	3.43	1,000	31047
K-100HB₂S-75-EP	●	스톱퍼 부착 With stopper									68		1,050	31053

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.

상품번호 Product No.	RoHS 10	ϕD	H	L₁×W₁	P₁×P₂	W	t	ϕd	허용 하중 kN Allowable load	제품질량(g) Mass	코드 Code
K-600HB₂-40-EP	●	40	60	74×44	60×30	25	2.3	6.5	1.96	195	31056
K-600HB₂-40-PA	●									200	31054
K-600HB₂-50-EP	●	50	72	80×50	66×36	28	2.6		2.45	270	31057
K-600HB₂-50-PA	●									295	31055
K-600HB₂-65-EP	●	65	92	111×71	91×47	38	2.9	10.5	2.94	620	31058
K-600HB₂-75-EP	●	75	106	123×72	103×52				3.43	720	31059

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.