

K-420G

철제

K-420R

철제

프레스 회전 캐스터

SWIVEL CASTERS

프레스 고정 캐스터

RIGID CASTERS



특징 Feature

- 조합해서 사용할 수 있습니다.
- 용도에 맞게 차륜의 재질 및 직경을 선택할 수 있습니다.
- Can be used together with other units.
- Select wheel material and diameter from wide variations according to your application.

사양

- 재질:
본체/냉간 압연 강판(SPCC)
차륜/고무(R)·나일론(N)·우레탄(UR)
- 표면 마무리:
본체/아연 도금 크로메이트 처리(MFZn-C)
- 용도
중형·소형의 기기·작업대·왜건
- 납기
표준품...납기는 문의해 주십시오

Specifi-
cations

- Material:
Main body: Cold rolled steel plate (SPCC)
Wheel: Rubber (R), nylon (N), or urethane (UR)
- Finish:
Main body: Zinc plating chromate treatment (MFZn-C)


Specific-
use

- Middle or small-sized equipment, benches and wagons






K-420G-75-R

[K-420G]

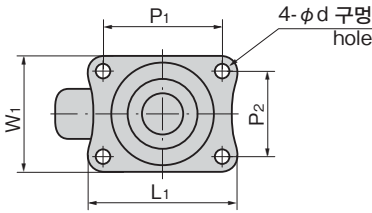

K-420R-75-R

[K-420R]

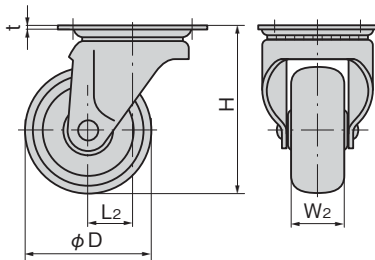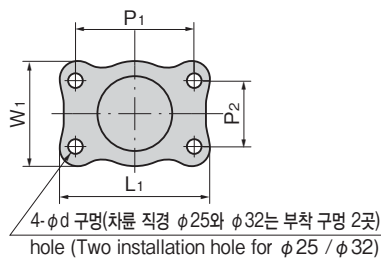

※표 안의 W2는 고무 차륜을 나타냅니다.

※W2 on the table indicates rubber-used wheel.

상품명 Product No.	고무 차륜 Rubber-used wheel	나일론 차륜 Nylon-used wheel	우레탄 차륜 Urethane-used wheel	φD	H	L1×W1	P1×P2	L2	W2	t	φd	선회 반경 Slewing radius
	RoHS 10 ⁺	RoHS 10 ⁺	RoHS 10 ⁺									
K-420G-25(차륜 Wheel)	●	●	●	25	35	35×30	28×23	9	12	1.4	4.2	23
K-420G-32(차륜 Wheel)	●	●	●	32	42	38×32	30×24	11	14	1.4	4.2	28
K-420G-38(차륜 Wheel)	●	●	●	38	50	46×38	36×28	12	17	1.6	5.3	33
K-420G-50(차륜 Wheel)	●	●	●	50	65	59×47	46×35	16	20	1.8	6.5	42
K-420G-65(차륜 Wheel)	●	●	●	65	80	70×58	55×42	21	26	2.3	8.8	55
K-420G-75(차륜 Wheel)	●	●	●	75	90	70×58	55×42	21	26	2.3	8.8	60
K-420R-25(차륜 Wheel)	●	●	●	25	35	36×18	29×0	12	1.6	4.2		
K-420R-32(차륜 Wheel)	●	●	●	32	42	36×20	29×0	14	1.6	4.2		
K-420R-38(차륜 Wheel)	●	●	●	38	50	46×25	36×15	17	1.8	5.3		
K-420R-50(차륜 Wheel)	●	●	●	50	65	58×40	45×25	20	2	6.5		
K-420R-65(차륜 Wheel)	●	●	●	65	80	70×47	55×28	26	2.3	8.8		
K-420R-75(차륜 Wheel)	●	●	●	75	90	70×47	55×28	26	2.3	8.8		

상품명 Product No.	허용 하중 N Allowable load			제품질량(g) Mass			고무 차륜 Rubber-used wheel	나일론 차륜 Nylon-used wheel	우레탄 차륜 Urethane-used wheel
	R 차륜 R-used wheel	N 차륜 N-used wheel	UR 차륜 UR-used wheel	R 차륜 R-used wheel	N 차륜 N-used wheel	UR 차륜 UR-used wheel	코드 Code	코드 Code	코드 Code
K-420G-25(차륜 Wheel)	78	98	98	35	35	40	30359	30365	30377
K-420G-32(차륜 Wheel)	118	176	176	50	45	50	30360	30366	30378
K-420G-38(차륜 Wheel)	196	274	274	90	80	85	30361	30367	30379
K-420G-50(차륜 Wheel)	294	372	372	170	150	160	30362	30368	30380
K-420G-65(차륜 Wheel)	392	539	539	350	250	260	30363	30369	30381
K-420G-75(차륜 Wheel)	490	637	637	370	270	280	30364	30370	30382
K-420R-25(차륜 Wheel)	78	98	98	25	20	25	30386	30392	30404
K-420R-32(차륜 Wheel)	118	176	176	35	30	35	30387	30393	30405
K-420R-38(차륜 Wheel)	196	274	274	65	50	55	30388	30394	30406
K-420R-50(차륜 Wheel)	294	372	372	130	100	110	30389	30395	30407
K-420R-65(차륜 Wheel)	392	539	539	240	170	180	30390	30396	30408
K-420R-75(차륜 Wheel)	490	637	637	290	190	200	30391	30397	30409

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.