K-1371·K-1372
스텐레스제

RoHS 10 스텐레스

초소형 슬라이드 레일
COMPACT SLIDE RAILS

K-1371-10

K-1372-10

특징 Feature

- 초소형으로 다양한 소형 부품의 슬라이드 기구에 사용할 수 있습니다.
- 슬라이드부는 볼 베어링을 채용하여 움직임이 유연합니다.
- 스텐레스제로 내식성이 뛰어납니다.

- Compact, allowing use in slide mechanism of wide range of compact parts.
- Ball bearings in sliding components enable smooth movement.
- Stainless, corrosion-resistant.

사양	● 재질: 냉간 압연 스텐레스 강판(SUS304)
용도	● 정밀기기·계측기기·시험기
비고	● 부착에는 M2.3 냄비머리 소나사 또는 정밀기기용 십자구멍 냄비머리 소나사를 사용하십시오. ● 부착 나사 길이는 부착면 두께 +1.0~1.8mm로 하십시오. (K-1371은 내부 회원 한정) ● 본 제품을 오래 사용하기 위해서는 정기적으로 접동부에 윤활제를 도포해 주시기 바랍니다. (권장 윤활제: 리튬계 그리스)

Specifications	● Material: Cold Rolled Stainless Steel Sheet (SUS304)
Specific-use	● Precision equipment, measurement equipment, test equipment
Remarks	● Use M2.3 round head machine screws or cross recessed round head machine screws for precision equipment when installing. ● Length of screws must be thickness of base being installed to plus additional 1.0 to 1.8mm. (For K-1371, inner member only) ● To prolong the life of the product, apply a regular coating of lubricant to the sliding parts. (Recommended lubricant: lithium grease)

〔K-1371〕

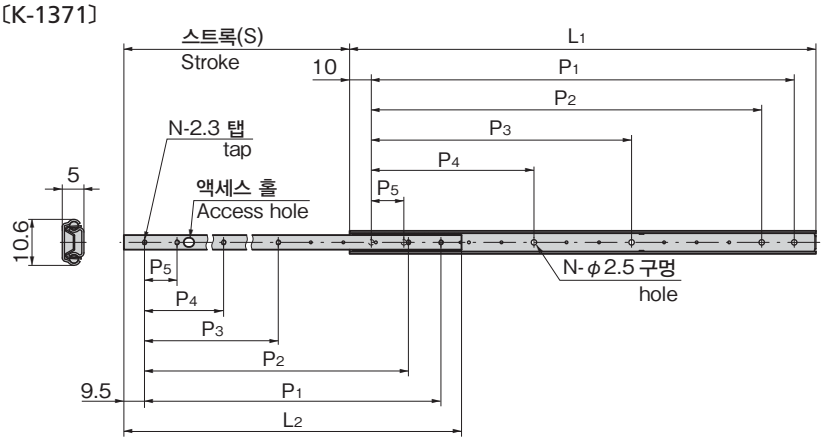

〔K-1372〕

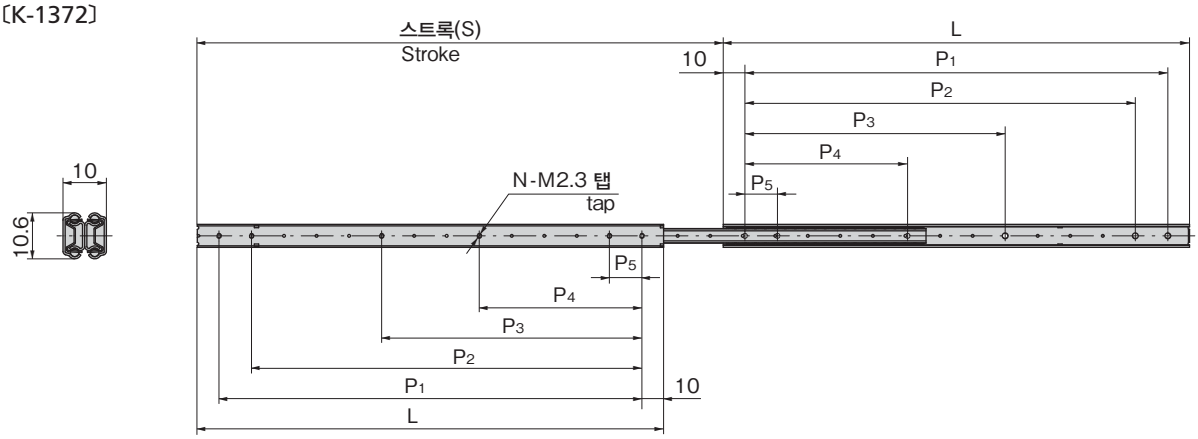

상품번호 Product No.	RoHS 10	L1	L2	P1	P2	P3	P4	P5	(S)	N	허용 하중 N/pair Allowable load	제품질량(g) Mass	코드 Code
K-1371-5	●	50	49	30					25	2	74	7	31825
K-1371-10	●	95	94	75	60	15			56	4	54	12	31826
K-1371-16	●	155	154	135	120	60	15		116	5	50	19	31827
K-1371-22	●	215	214	195	180	120	75	15	162	6	30	26	31828

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.

상품번호 Product No.	RoHS 10	L	P1	P2	P3	P4	P5	(S)	N	허용 하중 N/pair Allowable load	제품질량(g) Mass	코드 Code
K-1372-5	●	50	30					50.5	4	29	13	31829
K-1372-10	●	95	75	60	15			113	8	39	24	31830
K-1372-16	●	155	135	120	60	15		178	10	59	40	31831
K-1372-22	●	215	195	180	120	75	15	243	12	59	55	31832

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.