

특징 Feature

- 돌기가 작은 평평한 덮개입니다.
- 도장 후에 래치, 자물쇠, 패키지를 간단히 장착할 수 있습니다.
- This flush lid has only few projections.
- The latch, lock, and packing can be readily incorporated after coating.

사양

- 재질:
덮개/냉간 압연 강판(SPCC)
래치/AAS 수지
자물쇠/아연합금(ZDC)
패킹/에틸렌·프로필렌 고무(EPDM)
- 표면 마무리: 아연 도금 크로메이트 처리 (MFZn-C)

용도

- 버스·특장차·캠핑카 등의 덮개

비고

- 용접 또는 구멍을 뚫어서 부착하십시오.
- 핸들은 CP-875-2(1077페이지)를 사용했습니다.
- 자물쇠는 CP-315-D(1028페이지)를 사용했습니다.
- 열쇠가 없는 것도 가능합니다.
- 쾌적하게 사용하기 위해 수시로 윤활 스프레이 등을 주입하여 동작 확인해 주십시오.
- 패키지는 덮개 뒷면에 부착할 것을 권장합니다.

Specifications

- Material: Lid: Cold rolled steel plate (SPCC)
Latch: AAS resin
Lock: Zinc alloy (ZDC)
Packing: Ethylene propylene rubber (EPDM)

Specific-use

- The lids of busses, specially equipped vehicles and camping cars.

Remarks

- Attach either by welding or by drilling.
- Use the CP-875-2 (P.1077) as the handle.
- Use the CP-315-D (P.1028) as the lock.
- For smooth operation, lubricate it by oil spray at certain intervals and check the operation.
- It is recommended that the packing be applied to the back of the lid.

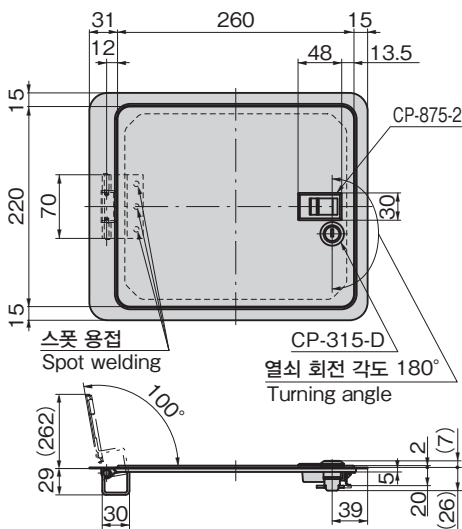


FD-895-1

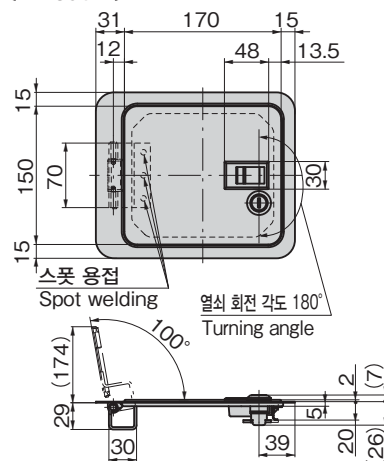
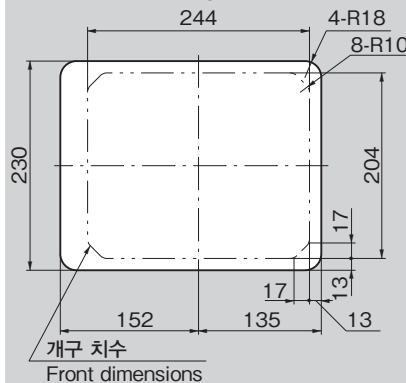
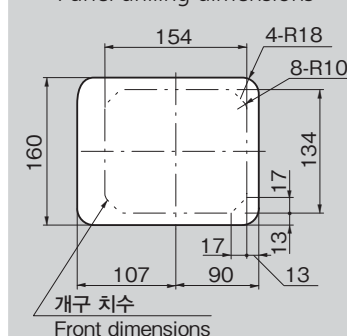
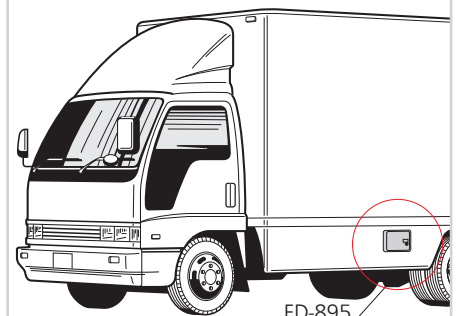
키 No.T0230
Key

FD-895-2

[FD-895-1]



[FD-895-2]

패널 구멍 치수
Panel drilling dimensions개구 치수
Front dimensions패널 구멍 치수
Panel drilling dimensions개구 치수
Front dimensions사용 예
Example of application

FD-895

상품번호 Product No.	RoHS 10	제품질량(g) Mass	코드 Code
FD-895-1		1,050	64100
FD-895-2		655	64101

- RoHS10 대응품
- ▲ RoHS10에 대응 가능합니다.