

## AP-140-Si

플라스틱제



## 실리콘 코팅 핸들

SILICONE COATED HANDLES

핸들 · 손잡이 · 노브 · 주변기기



AP-140-Si-1-1-N7

AP-140-Si-2-1-5Y7/1



키 No. TAK60 Key





키 No. 0200 Key

### 특징 Feature

- 실리콘 코팅으로 내식성이 뛰어납니다.
- 방수 타입
- 좌우 겸용형(출하 시는 오른손용으로 셋팅되어 있습니다.)
- A-140과 부착 호환성이 있습니다.
- Superior corrosion-resistant silicone coating.
- Water-resistant
- For both left-hand and right-hand use (Set to right-opening at shipment.)
- Interchangeable with A-140.

사양	● 재질: 본체/실리콘(Si) 알루미늄 합금(ADC) ● 표준색: 아이보리(5Y7/1)·그레이(N7) ● 부속품: 대너트·나사 세트·키 2개
용도	● 옥외 큐비클·진동기기
납기	● 표준품...납기는 문의해 주십시오
비고	● 마스터 시스템, 지정 동면, 열쇠가 다른 타입도 제작합니다. ● 실리콘 제품이기에 때문에 약품 등으로 세정하면 표면이 녹을 우려가 있습니다. 중성세제 등으로 가볍게 세정해 주십시오. ● 좌우 교체 방법은 크기에 따라 다릅니다. 상세한 내용은 문의해 주십시오. ● 본 제품의 스톱퍼 부착용 나사는 풀림 방지를 위해 '풀림 방지제'를 도포할 것을 권장합니다. ● 풀림 방지제 등 용제를 사용할 때는 충분한 검증을 실시하십시오.

Specifications	● Material: Body/Silicone (Si) Aluminium alloy (ADC) ● Standard color: Ivory (5Y7/1), Gray (N7) ● Accessories: Large nut, screws, two keys
Specific use	● Outdoor cubicles, oscillation devices
Remarks	● Made of silicone. Washing with chemicals may melt surface. Wash with mild soap. ● Method of rearranging left/right differs with size. Contact us for details. ● It is recommended that thread-locking fluid be used to prevent loosening of the mounting screws for the catch. ● Be sure to test adequately when using a solvent such as thread-locking fluid.

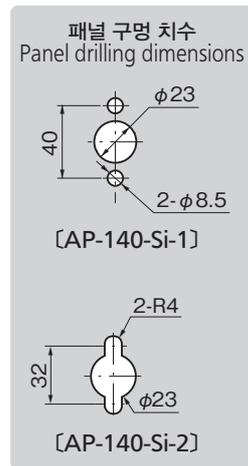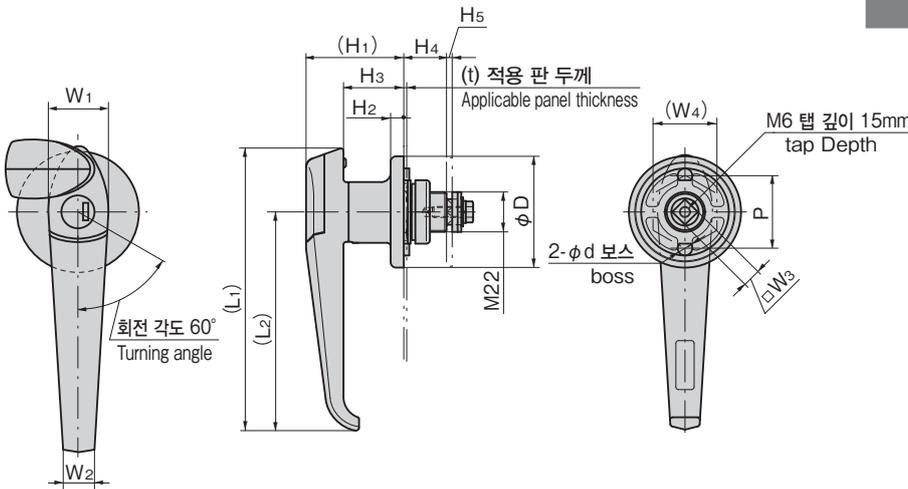

상품번호 Product No.	RoHS 10	열쇠 번호 Key No.	(L1)	(L2)	W1	W2	□W3	(W4)	H1	H2	H3	H4	H5	P	φD	φd	(t)	제품질량(g) Mass	코드 Code
AP-140-Si-1-1-5Y7/1-TAK60		TAK60																	04545
AP-140-Si-1-1-5Y7/1		0200	155	120	33	16.5	10	35	53.5	7.2	33	23.5	8	40	61.4	8	0.8 10	280	04359
AP-140-Si-1-1-N7-TAK60		TAK60																	04546
AP-140-Si-1-1-N7		0200																	04358
AP-140-Si-2-1-5Y7/1-TAK60		TAK60																	04548
AP-140-Si-2-1-5Y7/1		0200	124	96	28	15	8	30	46.5	6.5	27.5	13.3	5	32	51	7	0.8 5.0	180	04541
AP-140-Si-2-1-N7-TAK60		TAK60																	04547
AP-140-Si-2-1-N7		0200																	04542

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.