
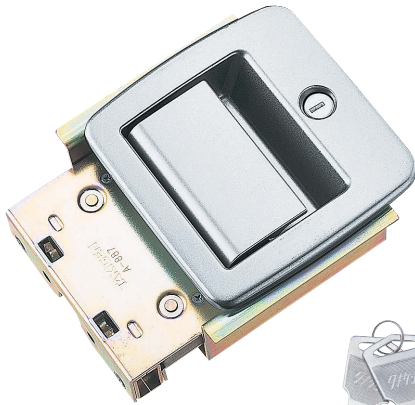



A-887
알루미늄제A-866-1L
알루미늄제

A-887

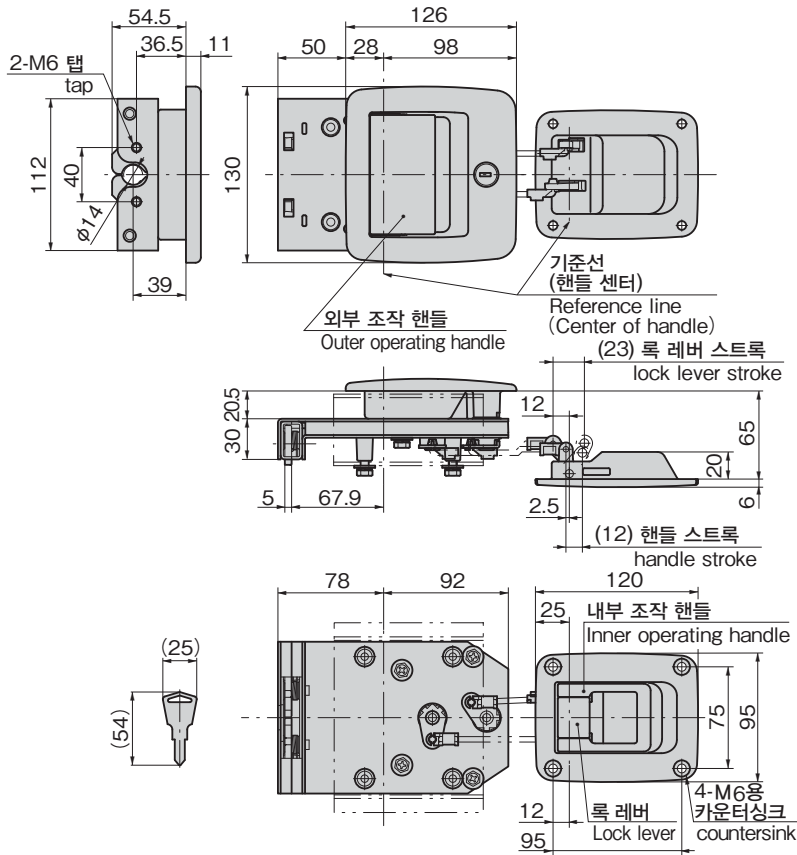

A-866-1L

키 No. T0230
Key

특징 Feature

- 더블 스내치 록을 채용한 튼튼한 내진구조입니다.
- 도어 내외로부터 핸들 조작 및 잠금과 해제를 할 수 있습니다.
- 아우터 핸들과 인너 핸들은 로드로 접속하고 있기 때문에 자유롭게 배치할 수 있습니다.
- Double-snatch lock durable construction.
- The handle operation and door locking/unlocking can be performed from the inside or outside.
- The outer handle is connected to the inner handle through a rod so the arrangement is free.

사양

- 재질: 핸들/알루미늄 합금(ADC)
잠금부/냉간 압연 강판(SPCC)
- 표면 마무리: 핸들/열처리 도장(실버 메탈릭)
록부/아연 도금 크로메이트 처리(MFZn-C)

- 열쇠 번호: T0230
- 부속품: 키 2개

용도

- 특장차·건설기계 등의 원터치 도어

비고

- 로드는 별매입니다.
- 스트라이커는 C-1851-S를 권장합니다. 상세 내용은 1155페이지를 참조하십시오.
- 오래 사용하기 위해서 정기적으로 접동부에 윤활제를 도포해 주십시오.

Specifications

- Material: Handle: Aluminum alloy (ADC)
Lock: Cold rolled steel plate (SPCC)
- Finish: Handle: Baked (silver metallic)
Lock: Zinc plating chromate treatment (MFZn-C)

- Key No.: T0230

Specific-use


- One-touch doors for specially vehicles, construction equipment etc.

Remarks

- Rods are optional.
- Recommend to use the strikers C-1851-S together. (See page 1155.)
- To prolong the life of the product, apply a regular coating of high-performance lubricant to the sliding parts.

부착 방법

Installation method

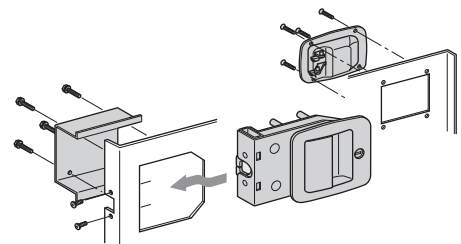

상품번호 Product No.	RoHS 10	비고 Remarks	제품질량(g) Mass	코드 Code
A-887		외부 조작 핸들 Outer operating handle	2,231	03489
A-866-1L		내부 조작 핸들 Inner operating handle	221	03490

●: RoHS10 대응품

▲: RoHS10에 대응가능합니다.