

# MS-35822

알루미늄제



## 미국 군용 규격 긴 경첩(MS 규격) MILITARY STANDARD CONTINUOUS HINGES

긴 경첩

B

경첩 · 지주 · 주변기기

CONTINUOUS HINGES

긴 경첩

평경첩

이면 경첩

탈착 경첩

스텝 경첩

클린 경첩

특장차 경첩

프리저 경첩

특수 경첩


토르크 경첩

지주

주변기기 (B)



MS-35822-9A

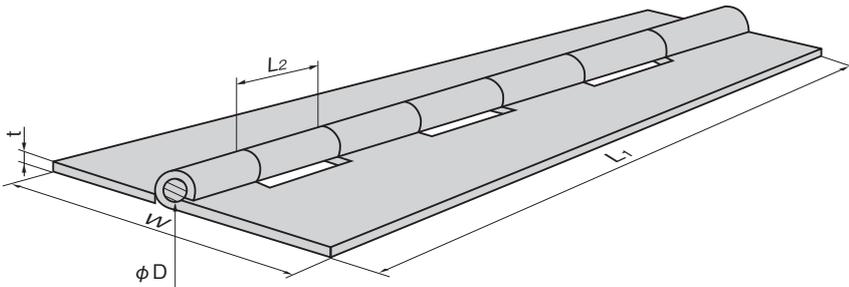

### 특징 Feature

- 알루미늄제로 내식성·내약품성이 뛰어납니다.
- 절단해서 사용할 수 있습니다.
- Corrosion-resistant/chemical-resistant aluminum is used.
- Cut and use.

### 사양

- 재질: 알루미늄 합금
- 표면 마무리: 알루미트 처리

### 용도

- 항공기·통신기기·측정기기·선박·차량· 소형 컨테이너 등의 케이스

### 납기

- 표준품...납기는 문의해 주십시오

### 비고

- MS-35823-6A/MS-35825/MS-20257 은 중지품이 되었습니다.



- 수입품이기 때문에 색이 다른 경우가 있습니다.
- 항공기에는 MS 규격품을 사용해 주십시오.
- 필요한 치수로 절단한 후 축에 코킹 등의 빠짐 방지 가공을 한 후 사용해 주십시오.
- 양단에 빠짐방지 가공을 하는 경우에는 반드시 같은 날개로 해주십시오. 다른 날개로 하면 작동 불량 원인이 됩니다.
- **장척 상품이기 때문에 배송료가 듭니다. 상세한 내용은 문의해 주십시오.**

### Specifications



- Aluminum alloy plate.
- Finish: Alumite treatment

### Specific-use

- Cases for aircraft, communication equipment, measuring equipment, ships, vehicles and small containers

### Remarks

- MS-35823-6A/MS-35825/MS-20257 are no longer manufactured.
- A color is sometimes different for the imports.
- The MS (Military Standard) articles must be used for the air crafts.
- The hinge is not processed to prevent extraction of the shaft. After cutting the hinge to size and before use, fix stops, etc., on the shaft to prevent its extraction.
- When fixing stops on both ends, always fix on the same wing. Fixing on different wings may cause faulty operation.

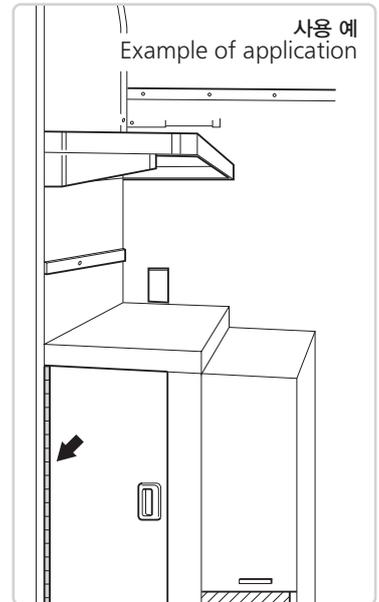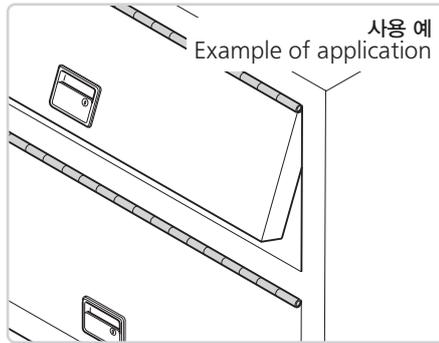

상품번호 Product No.	RoHS 10	L1	L2	W	t	φD	제품질량(g) Mass	코드 Code
MS-35822-9A		72(1828.8)	0.49(12.4)	1.062(27.0)	0.040(1.0)	0.091(2.3)	180	12463
MS-35822-10A		72(1828.8)	0.49(12.4)	1.25(31.8)	0.040(1.0)	0.091(2.3)	210	12464
MS-35822-12A		72(1828.8)	0.49(12.4)	2(50.8)	0.040(1.0)	0.091(2.3)	320	12466

단위는 인치·( ) 안의 치수는 mm를 나타냅니다. Unit: inches/dimensions in parentheses: mm

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.