

탈착 경첩

B-1048


스텐레스제

B-48

철제



골공용 횡형 평 경첩
BUTT HINGES

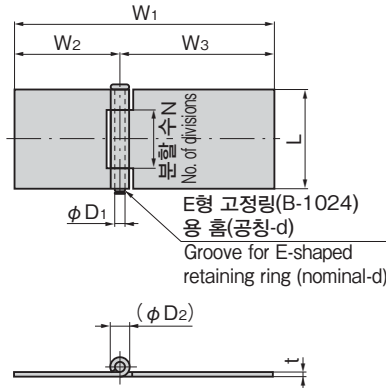

B-1048-2

상품명 Product No.		RoHS 10		제품질량(g) Mass		코드 Code	
SUS	SPCC	SUS	SPCC	SUS	SPCC	SUS	SPCC
B-1048-1	B-48-1	●	●	330	310	10645	10141
B-1048-2	B-48-2	●	●	120	120	10646	10142
B-1048-3		●	△	88	△	10647	△
B-1048-4	B-48-4	●	●	17	17	10648	10143
B-1048-5		●	△	76	△	10649	△
B-1048-6		●	△	69	△	10650	△
B-1048-7	B-48-7	●	●	20	20	10651	10144
B-1048-8	B-48-8	●	●	25	25	10652	10145

상품명 Product No.		L	W ₁	W ₂	W ₃	t		ϕD ₁	(ϕD ₂)	d (상품명) (Product No.)	N	참고치 Reference values			
SUS	SPCC					SUS	SPCC					도어 높이×도어 폭 Door height×door width		도어 질량(kg) Door mass	
B-1048-1	B-48-1	65	185	30	155	3	3	6	12.5	5(B-1024-5)	5	400×200		44	26
B-1048-2	B-48-2	51	128	52	76	2	2	5	9.5	4(B-1024-4)	3	400×200		23	11
B-1048-3		50	92	36	56	2	△	5	9.5	△	3	400×200		25	△
B-1048-4	B-48-4	20	90	45	45	1	1	3	5.5	△	3	300×100		3.5	1.8
B-1048-5		80	55	22	33	1.5	△	5	8.5	△	5	800×400		19	△
B-1048-6		60	52	24	28	2	△	5	9.5	△	4	800×400		19	△
B-1048-7	B-48-7	30	45	16	29	1.5	1.6	3	6.5	△	3	300×150		8.6	4.7
B-1048-8	B-48-8	36	23	11.5	11.5	2	2	5	9.5	△	3	300×150		15	7.6

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.

[B-1048]

사양

- 재질: 스테인레스 강판(SUS304)
- 표면 마무리: 광택 마무리(B-1048-1~3)
배럴 연마(B-1048-4~8)

비고

- B-1048-1·B-1048-2는 축이 탈착 타입, 다른 것은 탈착할 수 없습니다.

[B-48]

사양

- 재질: 냉간 압연 강판(SPCC)
- 표면 마무리: 아연 도금 크로메이트 처리 (MFZn-C)

비고

- B-48-1·B-48-2는 축이 탈착 타입, 다른 것은 탈착할 수 없습니다.
- E형 고정링은 부속되어 있지 않습니다. B-1024(756페이지)를 참조하십시오.

[B-1048]

Speci-
fications

- Material: Stainless steel plate (SUS304)
- Finish: Bright finish (B-1048-1~3)
Barrel polishing (B-1048-4~8)

Remarks

- Shaft cannot be slipped and jointed except for B-1048-1/2.

[B-48]

Speci-
fications

- Material: Cold rolled steel plate (SPCC)
- Finish: Zinc plating chromate treatment (MFZn-C)

Remarks

- Shaft cannot be slipped and jointed except for B-48-1/2.
- E-shaped retaining ring is not included. See B-1024 on page 756.

※본 그림은 탈착 타입을 기준으로 작도한 것입니다.
※Drawings are based on the slip-joint type.

긴 경첩

평경첩

이면 경첩

탈착

스텝

클린

특장차

프리저

특수

토크

지주

주변기기
(B)

SLIP-JOINT HINGES