

**B-1065** 스테인레스제  
**B-65** 철제



**중량용 탈착 경첩**  
SLIP-JOINT HINGES FOR HEAVY-DUTY USE



**특징 Feature**


- [B-1065]
- 스테인레스제로 내식성이 뛰어납니다.
  - 우형·좌형(본 그림은 우형입니다.)
  - Corrosion-resistant stainless steel is used.
  - Right or left type. (drawings show the right type)
- [B-65]
- 중량 도어에서 소형 도어까지 용도에 따라 크기를 선택할 수 있습니다.
  - 우형·좌형(본 그림은 우형입니다.)
  - Size from heavy to small can be selected according to your application.
  - Right or left type. (drawings show the right type)

사양	● 재질: 스테인레스(SUS304) ● 표면 마무리: 경면 버프 연마
용도	● 선박·차량·주방기기·옥외용 기기
[B-65]	
사양	● 재질: B-65-0·1/열간 압연 강판(SPHC) B-65-2~4/냉간 압연 강판(SPCC) ● 표면 마무리: 아연 도금 크로메이트 처리(MFZn-C)
용도	● 배분전반·공작기계·차량


[B-1065]	
Specifications	● Material: Stainless (SUS304) ● Finish: Mirror surface buffing
Specific-use	● Ships, vehicles, kitchen and outdoor equipment

[B-65]	
Specifications	● Material: B-65-0/1: Hot rolled steel plate (SPHC) B-65-2 to 4: Cold rolled steel plate (SPCC)
Specific-use	● Finish: Zinc plating chromate treatment (MFZn-C) ● Distribution boards, machine tools and vehicles

[구멍 있음 B-1065-10~14] with hole

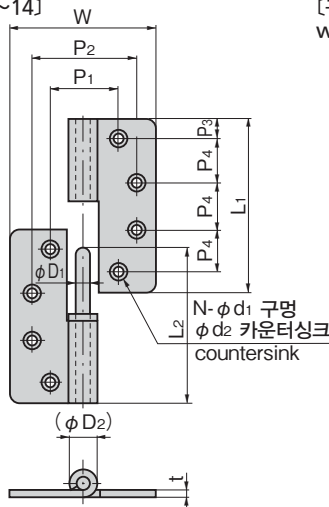

[구멍 없음 B-1065-0~4·B-65-0~4] without hole

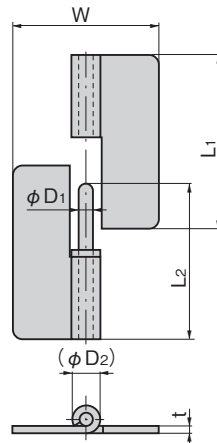

[구멍 있음 with hole]

상품번호 Product No.	RoHS 10	비고 Remarks	L1	L2	W	t	P1	P2	P3	P4	φD1	(φD2)	d1	d2	N	수직으로 2개 사용 시 참고 도어 질량(kg) Door mass when using two pcs vertically (reference)	제품질량(g) Mass	코드 Code
B-1065-10-L	●	좌형 Left type	125	115	100	4	44.5	74.5	17.5	30	9	17.5	6.4	12.8	8	60	531	13035
B-1065-10-R	●	우형 Right type																13036
B-1065-11-L	●	좌형 Left type	100	90	82	4	40	60	11	26	8	16.5	5.3	10.6	8	50	347	13037
B-1065-11-R	●	우형 Right type																13038
B-1065-12-L	●	좌형 Left type	75	70	70	3	40	50	10.5	27	6	12.5	5.3	10.6	6	30	165	13039
B-1065-12-R	●	우형 Right type																13040
B-1065-13-L	●	좌형 Left type	65	60	50	2.5	30	36	10.5	22	5	10.5	4.3	8.6	6	20	89	13041
B-1065-13-R	●	우형 Right type																13042
B-1065-14-L	●	좌형 Left type	50	45	40	2.5	26		10	30	5	10.5	4.3	8.6	4	15	60	13043
B-1065-14-R	●	우형 Right type																13044

[구멍 없음 without hole]

상품번호 Product No.		RoHS 10	비고 Remarks	L1	L2	W	t		φD1	(φD2)	수직으로 2개 사용 시 참고 도어 질량(kg) Door mass when using two pcs vertically (reference)	제품질량(g) Mass		코드 Code	
스테인레스 SUS	철 Iron	스테인레스 SUS	철 Iron	스테인레스 SUS	철 Iron	φD1	(φD2)	스테인레스 SUS	철 Iron	스테인레스 SUS		철 Iron	스테인레스 SUS	철 Iron	
B-1065-0-L	B-65-0-L	●	좌형 Left type	125	115	100	4	4.5	9	17.5	18.5	60	531	600	10669 10162
B-1065-0-R	B-65-0-R	●	우형 Right type												10670 10163
B-1065-1-L	B-65-1-L	●	좌형 Left type	100	90	82	4	4	8	16.5	16.5	50	347	355	10671 10164
B-1065-1-R	B-65-1-R	●	우형 Right type												10672 10165
B-1065-2-L	B-65-2-L	●	좌형 Left type	75	70	70	3	3.2	6	12.5	13	30	165	180	10673 10166
B-1065-2-R	B-65-2-R	●	우형 Right type												10674 10167
B-1065-3-L	B-65-3-L	●	좌형 Left type	65	60	50	2.5	2.6	5	10.5	11	20	89	95	10675 10168
B-1065-3-R	B-65-3-R	●	우형 Right type												10676 10169
B-1065-4-L	B-65-4-L	●	좌형 Left type	50	45	40	2.5	2.6	5	10.5	11	15	60	62	10677 10170
B-1065-4-R	B-65-4-R	●	우형 Right type												10678 10171

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.