



KC-251-12

특징 Feature

- 슬라이드부는 볼 베어링을 채용하여 움직임이 유연합니다.
- Slide section uses ball bearing so movement is smooth.

[KC-1251]

사양 ● 재질: 스테인스 강판(SUS304)

[KC-251]

사양 ● 재질: 냉간 압연 강판(SPCC)
● 표면 마무리: 아연 도금 크로메이트 처리(MFZn-C)

용도 ● 컴퓨터 주변기기·자동판매기·복사기·통신기·의료기기

비고 ● 부착에는 M4 바인드 소나사 또는 트러스 소나사를 사용하십시오.
● 탈착 타입 KC-251-A도 제작합니다.
● 본 제품을 오래 사용하기 위해서는 정기적으로 접동부에 윤활제를 도포해 주시기 바랍니다. (권장 윤활제: 리튬 비누기계 극압 그리스)


[KC-1251]

Specifications ● Material: Stainless steel plate (SUS304)

Specifications ● Material: Cold rolled steel plate (SPCC)
● Finish: Zinc plating chromate treatment (MFZn-C)

Specific-use ● Computer peripherals, vending machines, photocopiers, communication and medical equipment.

Remarks ● Please use M4 binding head machine screws or truss head screws for installation.
● To prolong use, it is recommended that a lubricant be applied regularly to the sliding parts. (Recommended grease: Lithium-soap base extreme-pressure grease)

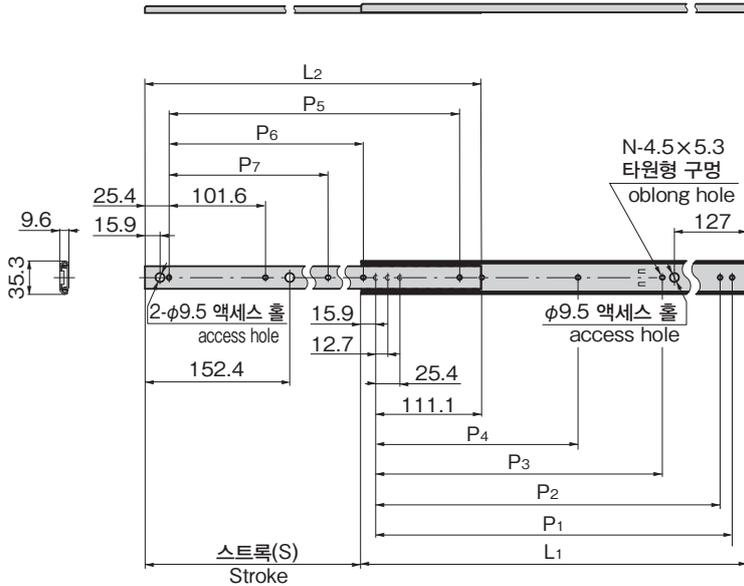

사용 예 Example of application



판금 가공품도 제작 가능합니다.
문의해 주십시오.

상품명 Product No.	RoHS 10	비고 Remarks	L1	L2	P1	P2	P3	P4	P5	P6	P7	N	(S)	허용 하중 N/pair Allowable load	제품질량 (g) Mass	코드 Code	
KC-251-12	●	SPCC	304.8	301.8	273	260.3	149.2	254	152.4				226	314	310	20594	
KC-1251-14	●	SUS	355.6	352.6	323.8	311.1	200	304.8	203.2			11	277	284		809298	
KC-251-14	●	SPCC	355.6	352.6	323.8	311.1	200	304.8	203.2				277	284	370	20595	
KC-251-16	●		406.4	403.4	374.6	361.9	250.8	355.6	254				302	353	415	20596	
KC-251-18	●		457.2	454.2	425.4	412.7	301.6	212.7	406.4	304.8	203.2			328	422	480	20597
KC-251-20	●		508	505	476.2	463.5	352.4	238.1	457.2	355.6	228.6			379	392	500	20598
KC-1251-22	●	SUS	558.8	555.8	527	514.3	403.2	263.5	508	406.4	254		404	441		809299	
KC-251-22	●	SPCC	558.8	555.8	527	514.3	403.2	263.5	508	406.4	254		404	441	570	20599	
KC-251-24	●		609.6	606.6	577.8	565.1	454	288.9	558.8	457.2	279.4			430	441	635	20600
KC-251-26	●		660.4	657.4	628.6	615.9	504.8	314.3	609.6	508	304.8			480	412	685	20601
KC-1251-28	●		SUS	711.2	708.2	679.4	666.7	555.6	339.7	660.4	558.8	330.2		506	412		809300
KC-251-28	●	SPCC	711.2	708.2	679.4	666.7	555.6	339.7	660.4	558.8	330.2		506	412	735	20602	

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.