




K-251-HD-14

특징 Feature

- K-251에 홀드 기구를 추가한 제품입니다. 꺼낸 상태에서 볼 록이 작동하여 간이로 잠금됩니다. 또한 수지 스톱퍼의 마찰력으로 수납 상태를 유지합니다.
- 슬라이드부는 볼 베어링을 채용하여 움직임이 유연합니다.
- These rails are the K-251 with a holding mechanism added. The ball lock activates a simple lock when the rails are extended. When retracted, the rails are kept closed by the friction force of the resin stopper.
- Use of ball bearings ensures smooth movement of the sliding section.

사양	● 재질: 냉간 압연 강판(SPCC) ● 표면 마무리: 아연 도금 크로메이트 처리(MFZn-C)
용도	● 컴퓨터 주변기기·자동판매기·복사기·통신기기
납기	● 표준품...납기는 문의해 주십시오
비고	● 본 제품을 오래 사용하기 위해서는 정기적으로 접동부에 윤활제를 도포해 주시기 바랍니다. (권장 윤활제: 리튬 비누기계 극압 그리스)

Specifications	● Material: Cold rolled steel plate (SPCC) ● Finish: Zinc plating chromate treatment (MFZn-C)
Specific-use	● Computer peripheral equipment, automatic vending machines, photocopiers, communication equipment
Remarks	● To prolong use, it is recommended that a lubricant be applied regularly to the sliding parts. (Recommended grease: Lithium-soap base extreme-pressure grease)

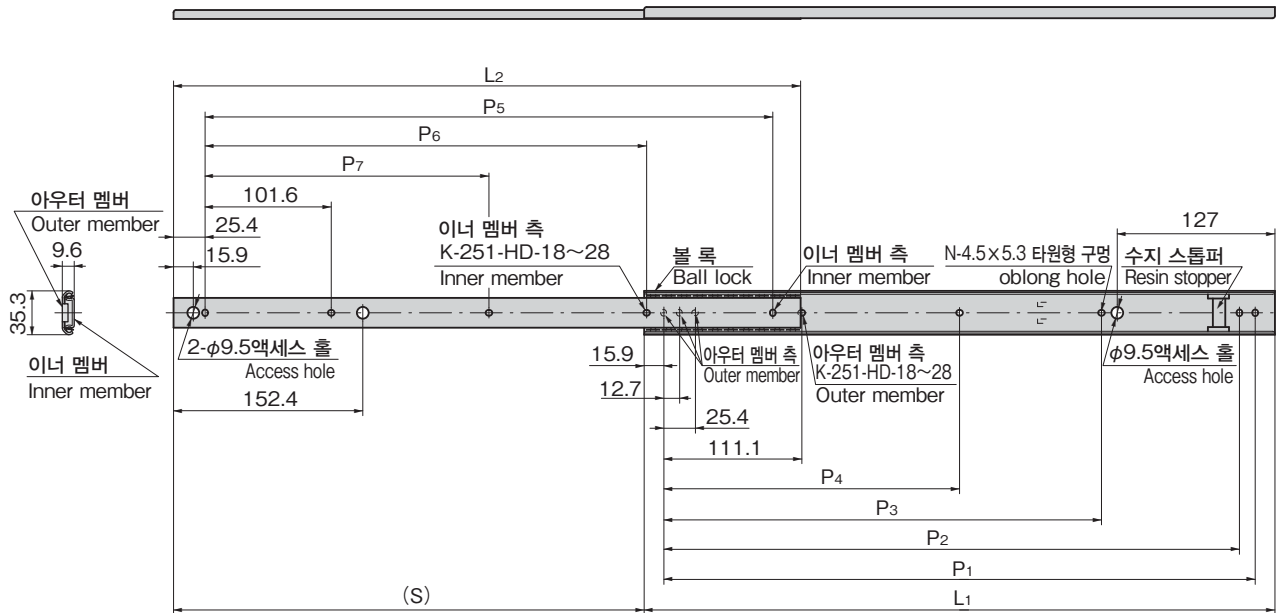

상품번호 Product No.	RoHS 10	L1	L2	P1	P2	P3	P4	P5	P6	P7	(S)	N	허용 하중 N/pair Allowable load	제품질량(g) Mass	코드 Code
K-251-HD-12	●	304.8	301.8	273	260.3	149.2		254	152.4		226	11	314	306	31424
K-251-HD-14	●	355.6	352.6	323.8	311.1	200		304.8	203.2		277		284	356	31425
K-251-HD-16	●	406.4	403.4	374.6	361.9	250.8		355.6	254		302		353	411	31426
K-251-HD-18	●	457.2	454.2	425.4	412.7	301.6	212.7	406.4	304.8	203.2	328		422	468	31427
K-251-HD-20	●	508	505	476.2	463.5	352.4	238.1	457.2	355.6	228.6	379	13	392	512	31428
K-251-HD-22	●	558.8	555.8	527	514.3	403.2	263.5	508	406.4	254	404		441	562	31429
K-251-HD-24	●	609.6	606.6	577.8	565.1	454	288.9	558.8	457.2	279.4	430		441	621	31430
K-251-HD-26	●	660.4	657.4	628.6	615.9	504.8	314.3	609.6	508	304.8	480		412	672	31431
K-251-HD-28	●	711.2	708.2	679.4	666.7	555.6	339.7	660.4	558.8	330.2	506		412	731	31432

●: RoHS10 대응품 ▲: RoHS10에 대응 가능합니다.